

# ECSS

## Standardization training program

### Space project management

TEC-QR

May 2016

**COPYRIGHT NOTICE:**

By using the ECSS Training material, developed by ESA, you agree to the following conditions:

1. The training shall take place at your premises and shall be addressed to your staff (internal participants);
2. In case of a training to be given to external participants, the prior ESA written authorisation shall be requested;
3. The ESA Copyright shall always be mentioned on all Training Material used for the purpose of the training and participants shall acknowledge the ESA ownership on such a Copyright;
4. The Training material shall not be used to generate any revenues (i.e. the training and Training Material shall be "free of charge" excl. any expenses for the training organisation);
5. Only non-editable PDF files of the Training Material can be distributed to the participants (nor power point presentations);
6. Any deficiency identified in the Training Material shall be reported to the ECSS secretariat;
7. If the Training Material is modified or translated, the ESA Copyright on such edited Training Material shall be clearly mentioned. A copy of the edited Training Material shall be delivered to ESA for information.
8. You shall always hold harmless, indemnify and keep ESA indemnified against any and all costs, damages and expenses incurred by ESA or for which ESA may become liable, with respect to any claim by third parties related to the use of the Training Material.

## The object of this session

### What this session is about...

This is a session on “Project management **standardization**”

### What this session is **NOT** about

This session is NOT about “Project management techniques”

### What is the difference?...

A clue: ECSS standards are for **use in contracts**...

## The approach followed

After a brief introduction to project management:

- An “ECSS universal principle” will be introduced.  
In this presentation it is called the “**ODSI**” principle
- Then the M books “will be open”, to confirm how much the ODSI principle is applied

1. Introduction – PM activities
2. ECSS overview and terminology (covered by Level 1)
3. ECSS management structure & approach
4. ECSS M-standard content
5. ECSS M-standards application & tailoring

### What is Project Management, and why is it needed?

- Project Management is an integrated process for documenting, monitoring, and controlling complex projects from conception, through design, development, manufacturing, operations, and disposal (i.e. throughout the life cycle of a project)
  
- The key objective of any Project Management system is to continuously “**keep in balance**” **4 key parameters** common to all projects. These are:
  - **Project Risk**
  - **Project Scope**
  - **Project Schedule**
  - **Project Cost**

- These 4 key parameters (**Risk, Scope, Schedule, Cost**) are directly linked to each other and interact continuously throughout the project life cycle. A change in any one of the 4 will automatically have an impact on at least one of the other three.
  
- For example, the measures needed to resolve an unforeseen problem can easily lead to one, several, or all of the following:
  - need for additional resources to correct the problem
  - modifications to the scope
  - a change in the perceived risk associated with the project
  - a need to extend the project schedule
  
- Any, or all of the above will have an impact on cost

# 1 - Introduction – PM activities

## Project Management – Project Content & Schedule

- **The scope** of a project essentially comprises:
  - the products and services to be delivered by the project
  - the facilities and resources needed to create the products and services
  - a detailed breakdown of all of the major tasks to be performed to implement the project.
  
- **The schedule** of a project is the accumulated **time needed** to:
  - Establish the project objectives, define the Mission Statement and Organise the project
  - Design, develop, manufacture, qualify and deliver the project's products, based on detailed planning and a logical flow of all tasks to be completed, within the available resources and facilities
  - Utilise the project deliverables during their operational lifetime
  - Safely dispose of project products at their end of life

- **The cost** of a project is the **total cost incurred** during the life cycle of the project for all:
- parts, materials and services
  - Labour
  - Facilities
  - external support
  - launch, operations and disposal
  - any other unforeseen expenditures needed to complete the project within the allocated timescale.



- **The risk** associated with implementing a project has to be determined very early in setting up the project.
- This level of perceived risk is based on an assessment of:
  - the **complexity** of the project (including comparisons with similar projects)
  - the **technology** to be used → See next for TRL
  - any **known constraints** or limitations to be imposed
  - any **other factors** that may apply.
- The initial risk assessment is one key input for finalising the project content, schedule and funding, including any reserves considered necessary
- Errors in initial risk assessment are likely to lead to cost and schedule increase beyond the normal margin planned

- **TRL (Technology readiness level) is a tool to measure the maturity of a technology**
- To knowing the TRL is a key factor to evaluate the risk of using a given technology for a critical function.
- TRL thermometer establishes 9 levels (from observation of physical principles, to flight proven) (see next slide for definition of levels)
- A new ISO document (ISO 16290) has been recently published **DEFINING** these levels (but not when to use them, this is left to managerial decision)
- ECSS is adopting this ISO document by the following actions:
  - Adoption of the ISO doc via AS, introducing few req's to make the ISO doc mandatory (it does not contain any "shall")
  - A new column is introduced in the "Techno matrix" (a DRD in E-ST-10 "SE"), to assess the TRL of the critical technologies
  - One requirement is introduced in Q-ST-10 "PA" that the evaluation of a TRL shall be confirmed by PA/QA.
  - A TRL HB is being developed to help in the application of the AS (and therefore, of the ISO doc) → **See Next**

(Cont'd)


- Also a HB has been recently started to help in the application of the TRL ISO and ECSS AS.
- It is based in a current ESA HB for TRL.
- Public review recently finished (13 May 2016).
- It will include:
  - Identification of critical technologies in a project (for a non-critical technology, the TRL is much less important)
  - Typical situations in which several TRLs are used.
  - How to move from a TRL to the next
  - Good practices for TRL evaluation (process)
  - TRL for SW, EEE components and materials

# 1 - Introduction – PM activities

## Project Management – Project Risk

Standardization  
training program  
Space Project Management

### Technology Readiness Levels (TRLs)

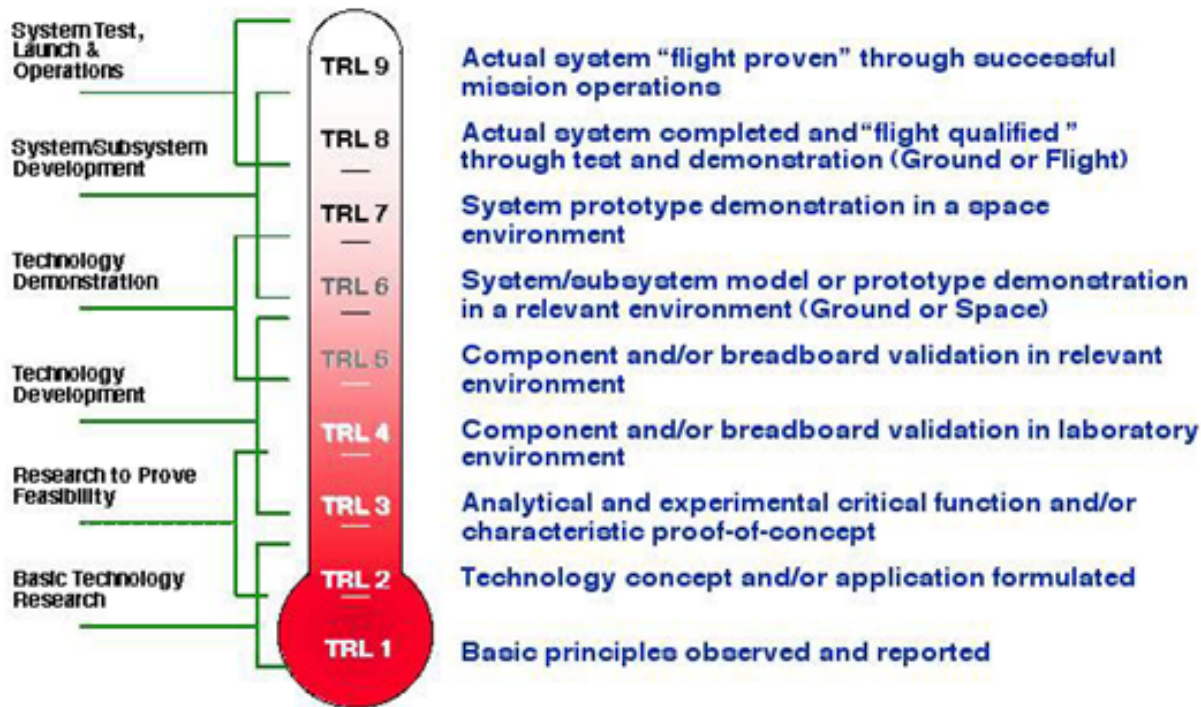

NB: The TRL scale evaluates a given technology **in the context of a specific application, not by itself**


If a given technology has been flying for a long time it does not mean that it is for sure at TRL 9, The TRL 9 is valid only for the ***exact same application*** with the ***exact same requirements*** (otherwise it is TRL 5)

How the definitions are applicable to SW is explained in the TRL HB

# 1 - Introduction – PM activities

## Project Management – Interaction & Balance

Standardization  
training program  
Space Project Management

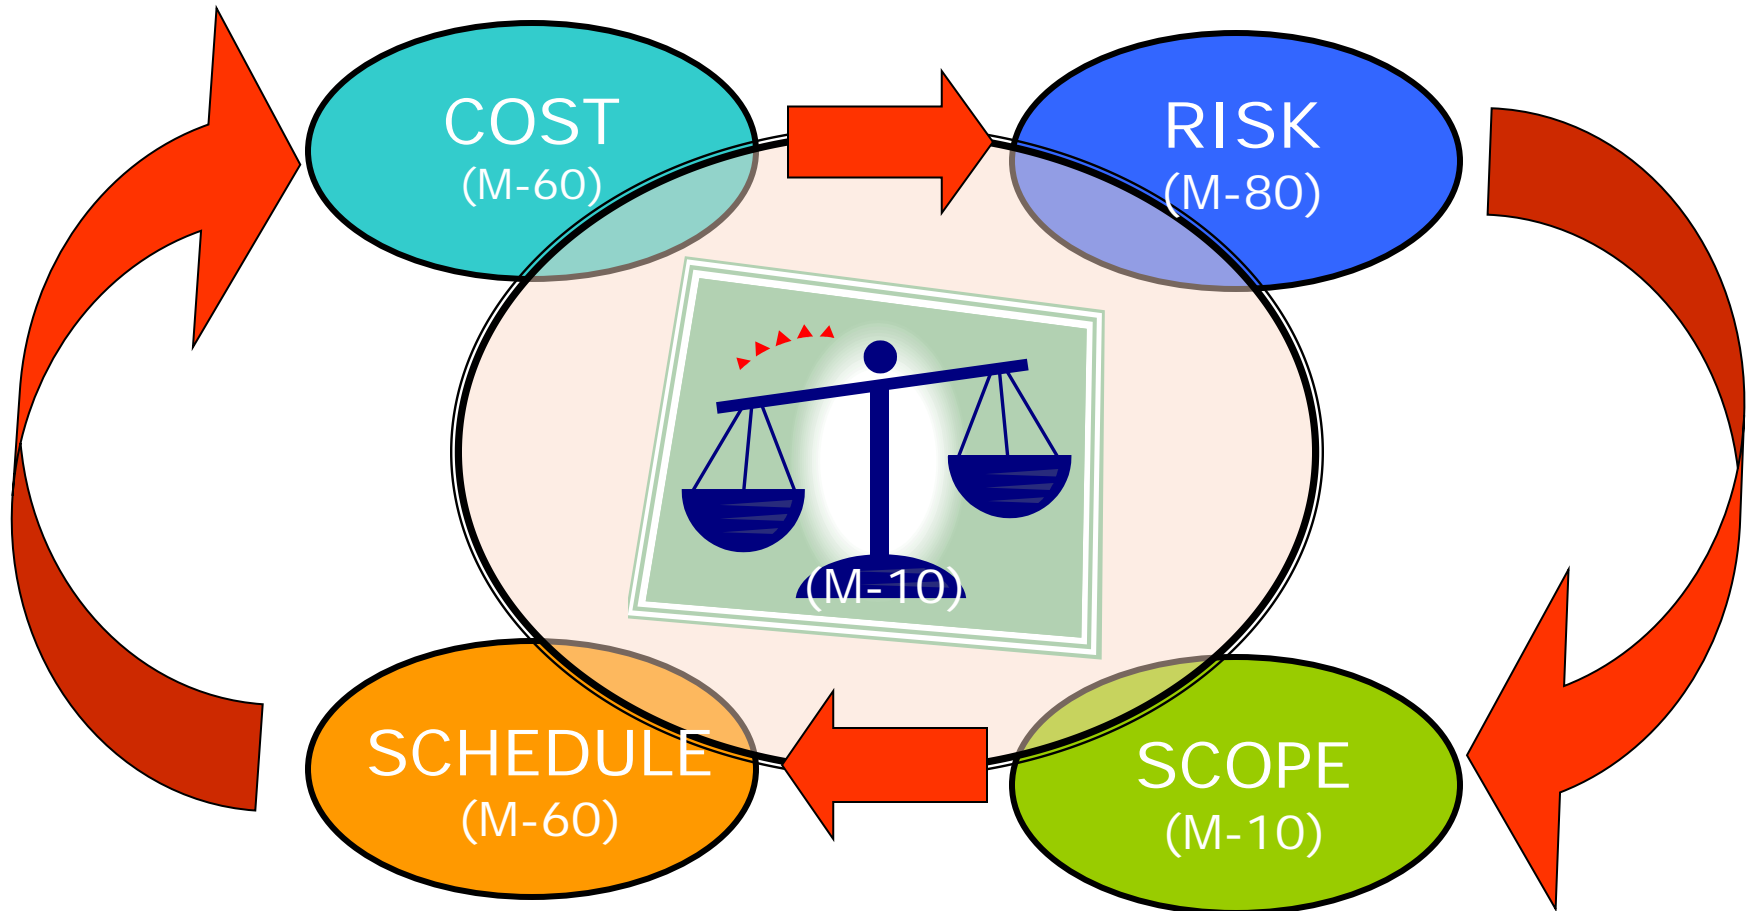

### Key objectives

- To establish a coherent set of standards (ECSS system) for direct use in a wide range and type of projects irrespective of the type of business agreement used to implement the project.
- To achieve this objective some requirements statements, especially in project management, have to be non-specific.
- In order to meet the specific requirements of individual projects, some tailoring of the standards is necessary in applying them.

### General information

- ECSS documents have been developed through a joint activity between European Space Agencies and industry (represented by EUROSPACE) to cover a wide range of project types
- Current set of documents available comprises:
  - 115 standards (of which 6 are M standards)
  - 22 handbooks (No handbooks in M branch)
  - 11 technical memoranda (No TMs in the M branch)
- European major industry (e.g. TAS, AST) is now very familiar with the content of the standards and in many cases has already integrated, or mapped, the content into their own in-house systems.

# 2 - ECSS overview & terminology

## ECSS branches' organization

Standardization  
training program  
Space Project Management


S – standardization system	Define the system of standardization documents, and specifies how to use it in Space projects	2 ST 0 HB 0 TM
M - management	Project management is responsible for the achievement of the totality of the project objectives and specifically for quality organization and its timely and cost effective execution	6 ST 0 HB 0 TM
Q - product assurance	Product assurance is responsible for the implementation of the quality assurance elements of the project and other activities like dependability, safety, parts, material and processes, software, and audits	52 ST 7 HB 5 TM
E - engineering	Engineering is responsible for the definition of the end product, verification that customer's technical requirements are achieved and in conformance with the regulation and company constraints	53 ST 14 HB 6 TM
U - sustainability	Sustainability is responsible for defining requirements contributing to the long term sustainability of space activities, including orbital debris mitigation, space situation awareness, and planetary protection	1 ST 0 HB 0 TM



# 2 - ECSS overview & terminology

## ECSS branches/disciplines

Standardization  
training program  
Space Project Management

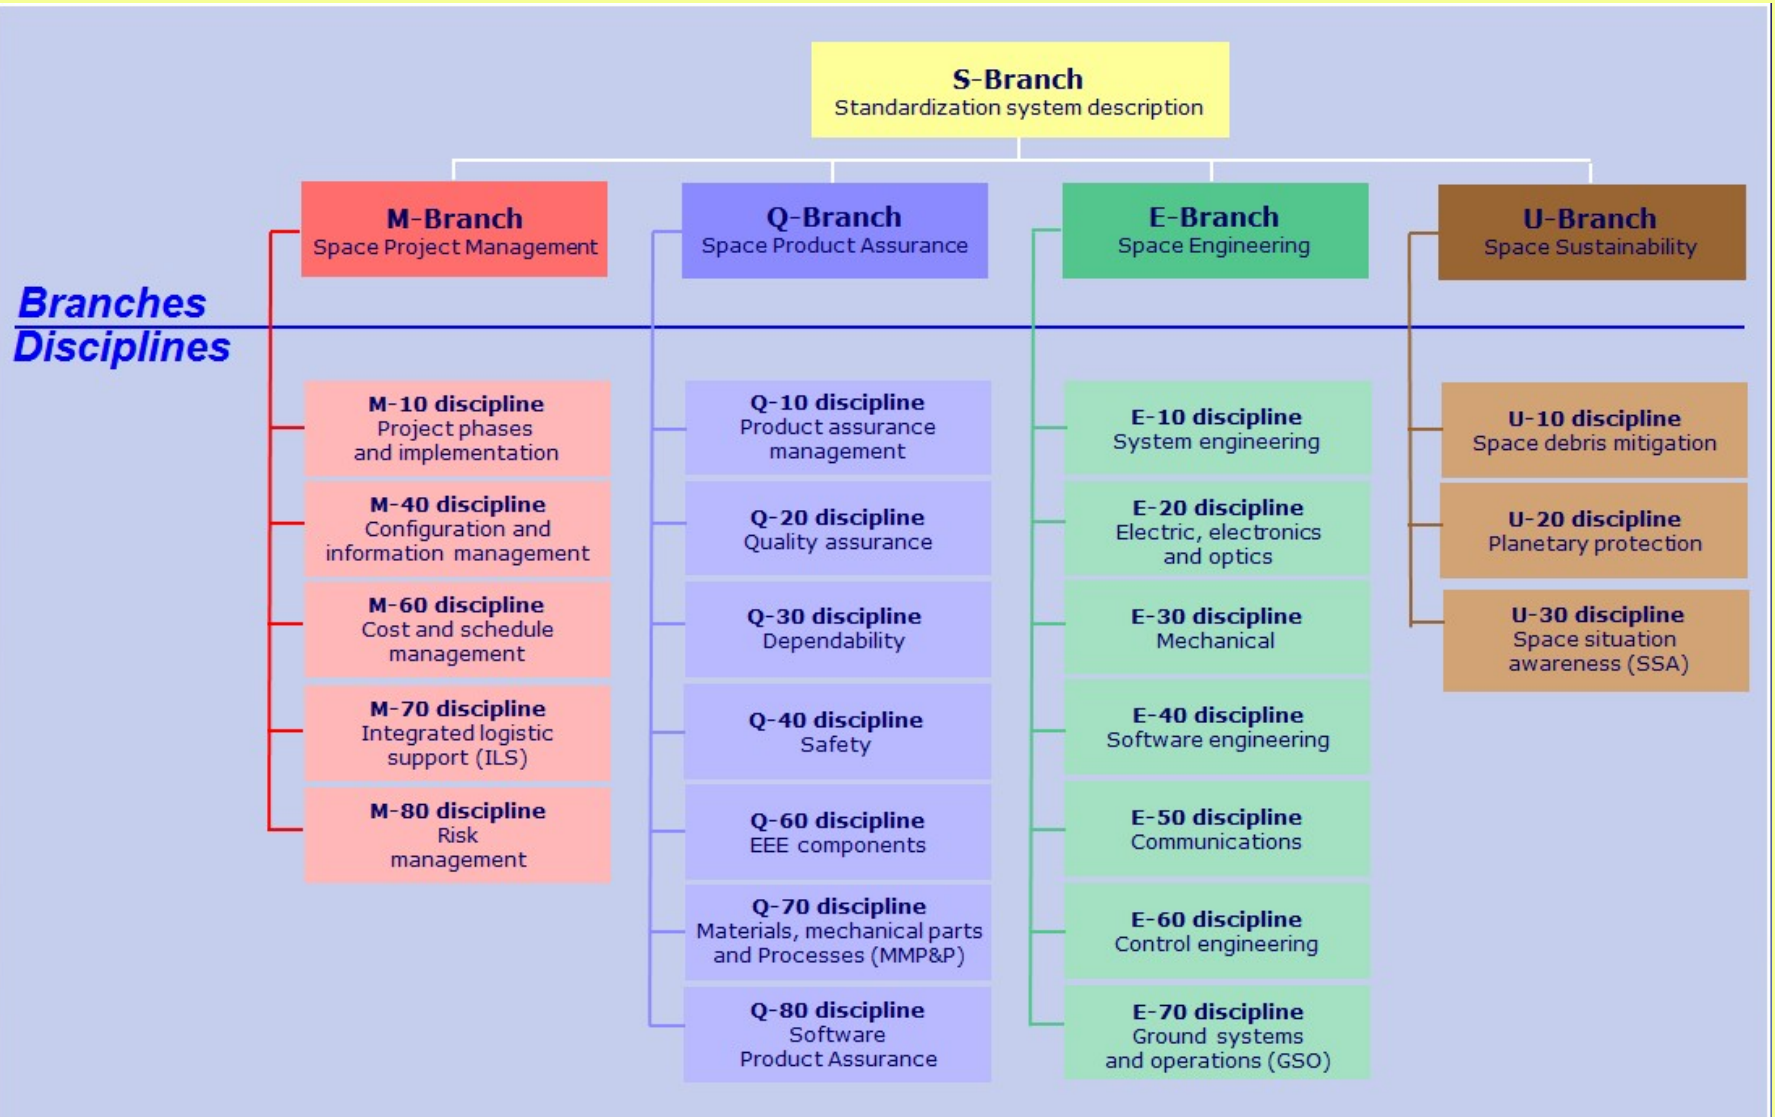

- ECSS standards focus mainly on “WHAT” is required rather than “HOW” to achieve
  - Some lower level Q-standards specify “How” for processes, e.g. soldering
- Common structure and format of standards across the different branches/disciplines
- Standard identification for normative statements as follows:
  - Requirements, with SHALL
  - Recommendations, with SHOULD
  - Permissions, with MAY

- Descriptive and normative statements are separated
- Only short descriptive texts to support understanding of the requirements
- Documents produced in response to requirements are specified in Document Requirements Descriptions (DRDs)
- Unique identifier per requirement and per DRD

# 2 - ECSS overview & terminology

Use this area for the sub-chapter title

Standardization  
training program  
Space Project Management

## Anatomy of a typical standard (ESA-only and ECSS)

- **Change log, ToC & [Introduction ]**
- 1. **Scope**  
Clearly and concise identification of the coverage and the applicability of the standard
- 2. **Normative references**  
Listing ONLY documents referenced from requirements.
- 3. **Terms, definitions and abbreviations**
- 4. **[ Principles and/or background ]**  
Containing ONLY informative/guidance material
- 5. **Requirements**  
Containing the normative provisions.  
It may contain some NOTES and some few guidance sub-clauses with only guidance material.
- 6. **[ More requirements... ]**
- Last  
Clause: **Pre-tailoring (per product type & project phase)**  
Only mandatory if standard is subject to pre-tailoring
- A,B,... **[ Annexes ]**  
First Normative annexes (DRDs),  
and then Informative annexes]
- **Bibliography**  
Listing the documents referenced from  
the informative/guidance text

Clause/section always present  
[Optional clause/section ]

## What are DRDs? (Document Requirement Definition)

- DRDs are Normative Annexes, i.e. they are requirements
- They specify the content of a deliverable document
- They do not specify the format, only the information to be provided.
- They are always referenced from a requirement specifying who, when, and how often the document shall be provided. The DRD specifies ONLY the content.


### Customer/Supplier chain (1/2)

- Customer = organization or person that receives a product as part of a business agreement
- Supplier = organization or person that provides a product as part of a business agreement
  - Note: the term product covers: services, software, hardware and processed materials.
- All space project actors are either a customer or a supplier, or both.
- Any actor in the Customer / Supplier chain could be a provider of a product to any other actor as a ...., (e.g. Customer Furnished Equipment)

# 2 - ECSS overview & terminology

## Customer/Supplier chain (2/2)

- A typical space project comprises a number of hierarchical levels:
  - the actor at the top level of the hierarchy is the top level customer with the overall responsibility for the implementation and management of the project,
  - the actors at intermediate levels of the hierarchy are both supplier and customer,
  - the actors at the lowest level of the hierarchy are suppliers only.

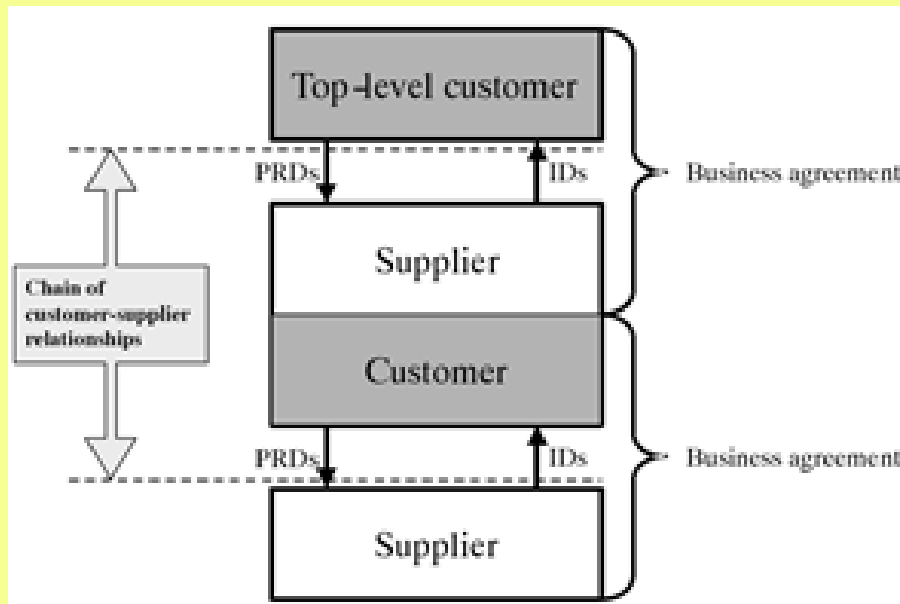


PRDs = Project Requirement Documents  
IDs = Implementation Documents

### Business agreement

- Business agreement = legally binding agreement, for the supply of goods or services, between two or more actors in the customer–supplier chain
  
- Business agreements are recorded in a variety of forms, such as:
  - Contracts,
  - Memoranda of understanding,
  - Inter-governmental agreements,
  - Inter-agency agreements,
  - Partnerships,
  - Bartering agreements, and
  - Purchase orders.

# 3 – ECSS-M structure & approach

## ECSS Management Tree

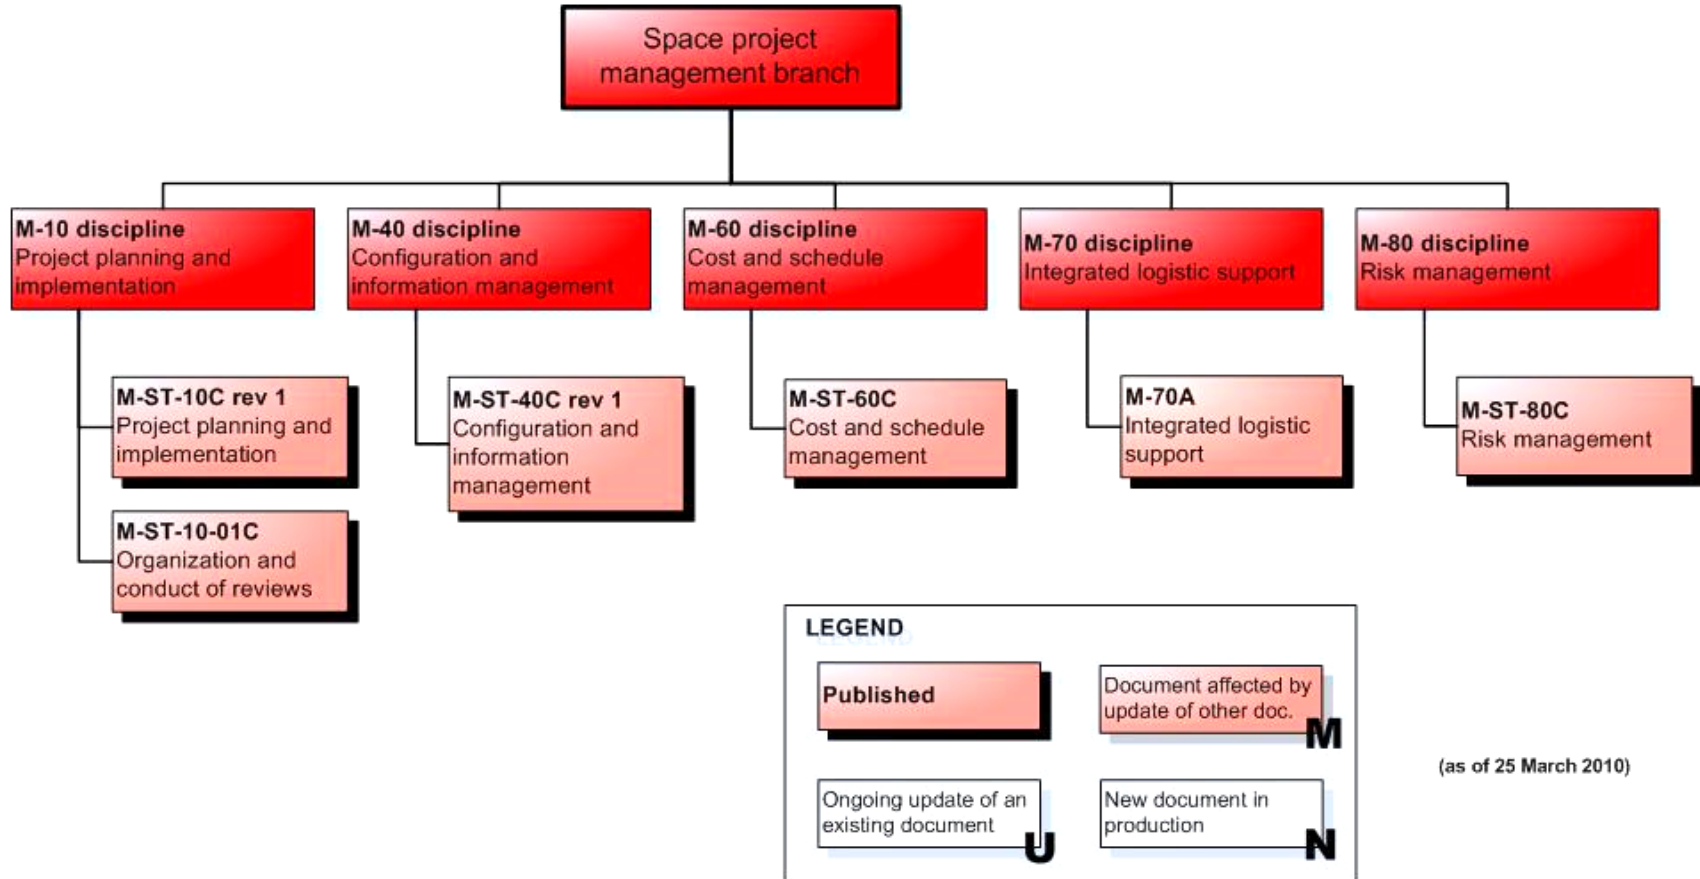



# 3 – ECSS-M structure & approach

## ECSS Management disciplines description

Discipline	Title & (Document)	Scope / Objective
M-10	Project Planning and Implementation (ECSS-M-ST-10 and ECSS-M-ST-10-01)	<p>Set of processes/requirements for minimizing the technical, scheduling and economic risks of the project. In particular this is done by:</p> <ul style="list-style-type: none"><li>•introducing <b>phases and formal milestones</b> enabling the progress of the project to be controlled with respect to cost, schedule and technical objectives.</li><li>•defining <b>project breakdown structures</b>, which constitutes the common and unique reference system for the project management to:<ul style="list-style-type: none"><li>•identify the <b>tasks and responsibilities</b> of each actor;</li><li>•ensure the <b>coherence between all activities</b> (technical, documentary, administrative and financial) of the whole project;</li><li>•perform <b>scheduling and costing</b> activities.</li></ul></li><li>•setting up a <b>project organization</b> to implement a structured and complete approach to perform all necessary activities on the project.</li></ul>

# 3 – ECSS-M structure & approach

## ECSS Management disciplines description

Discipline	Title & (Document)	Scope / Objective
M-40	Configuration and Information Management (ECSS-M-ST-40)	Set of processes/requirements for performing configuration and information management : <ul style="list-style-type: none"><li>•identifies, describes and controls the <b>technical description of a system</b> in a logical and consistent manner throughout the system's life cycle, and</li><li>•ensures that the <b>information</b> necessary for effective execution of all management processes are recorded, retrieved, distributed and modified in a traceable manner.</li></ul>
M-60	Cost and Schedule Management (ECSS-M-ST-60)	Set of processes/requirements for verifying the compliance of project planning and organization to ensure the <b>consistent use of resources</b> (human, facilities, materials and funds) to achieve the successful completion of the space project within its established goals: costs, schedule and performance.  It provides alerts to trigger necessary adaptations (e.g. re-planning, resource reallocation).

# 3 – ECSS-M structure & approach

Standardization  
training program  
Space Project Management

## ECSS Management disciplines description

Discipline	Document & Title	Scope / Objective
M-70	Integrated Logistic Support (ECSS-M-70)	Set of requirements necessary for minimizing cost of the logistic support <b>throughout the system life cycle</b> .
M-80	Risk Management (ECSS-M-ST-80)	<p>Risk management discipline identifies all risks (incl. new opportunities) and <b>keeps these risks within defined and accepted boundaries</b> that are defined in the risk policy of the project.</p> <p>Risk management aims at <b>all aspects of the programme</b>, including technical and quality performance, programmatic (e.g. funding, political environment), cost (e.g. contract type, project cost), schedule and operation (e.g. logistic support, security). In particular it includes:</p> <ul style="list-style-type: none"><li>•The systematic identification, assessment and classification of all risk causes and consequences prior to definition and implementation of a decision to accept, to monitor or to take action. The risk assessment supports the decision making process, including consideration of uncertainties about the risk involved. Independent verification of the risk assessment ensures its objectiveness.</li><li>•The systematic definition, implementation, control and verification of actions appropriate for elimination or reduction of risk to an acceptable level.</li></ul>

# 3 – ECSS-M structure & approach

## ECSS Management branch evolution

The merging of M standards undertaken between Rev B and Rev C is shown below:

Revision B management standards	Revision C management standards
M-00 Project Management	Requirements to M-ST-10/Descriptive to S-ST-00
M-00-02 Tailoring of Standards	Moved to S-ST-00 Description, implementation and general requirements
M-00-03 Risk Management	Updated and Renumbered M-ST-80
M-10 Project Breakdown Structures	Merged in M-ST-10 Project Planning & Implementation
M-20 Project Organisation	
M-30 Project Planning & Phasing	
M-30-01 Conduct of Reviews	M-ST-10-01 Conduct of Reviews
M-40 Configuration Management	M-ST-40 Configuration & Information Management
M-50 Info/Doc Management	Merged into M-ST-40
M-60 Cost and Schedule Management	M-ST-60 Cost & Schedule Management
M-70 Integrated Logistics Support	Not changed – Still in Issue A

# 3 – ECSS-M structure & approach

## Content structure of ECSS-M standards

	Clauses									
	1	2	3	4	5	6	7	8	9	
M-ST-10C	S C O P E	Normative References	Terms and definitions	#	@					
M-ST-10-01C				#	@					
M-ST-40C				#	@					
M-ST-60C				#	#	#	@	@	@	
M-ST-70C				#	@	@	@	@		
M-ST-80C				#	#	#	@			

Annexes		Bib
Normative (DRDs)	Informative	
@ 5 DRDs	3	BIBLIOGRAPHY
@ 4DRDs	2	
@ 10 DRDs	3	
@ 15 DRDs	3	
@ 3 DRDs	2	

- Informative
- Normative
- # Principles
- @ Requirements

**Note that Clauses 4 (and for M-ST-60 and M-ST-80, also Clauses 5 and 6) describe the principles, i.e. how the activities are performed in a typical project**

1. Many high level requirements (mainly in the 5 Level-2 standards) are drafted following the “**ODSI**” principle:

- a. - **O**rganize yourself in your own way
- b. - **D**ocument how you have organized yourself
- c. - **S**ubmit this document to your customer for approval
- d. - **I**mplement this organization (once approved)

2. This philosophy is very convenient for already established suppliers, but newcomers may have difficulties in understanding what it is required from them. To help them, many times some information is available.

Therefore, the ODSI principle can be extended to:

- e. If you don't know how to comply with a. above, informative material may be available in Chapter 4, informative annexes or handbooks.

# 3 – ECSS-M structure & approach

## General approach (2/2)

1. This “To document” normally implies that a **DRD** is required
2. Approval by the customer is important for 2 reasons:
  - a. To ensure correctness
  - b. To ensure consistency through the whole project
3. Example: M-ST-10C “Project planning and implementation, # 5.1.3:

*h. “The supplier shall establish the Work Breakdown Structure (WBS) for his work share, incorporating the WBS of his lower tier suppliers, in conformance with Annex C”*

*k. The WBS shall be subject to customer approval”*

**In the next slides, anything with the background in green is following this principle**

# 4 - ECSS M-standards content

## M-ST-10

### Project Planning & Implementation

Standardization  
training program  
Space Project Management

Clause & Req	Topic (what reqs are addressing)	DRD (Annex)	Provided information (Clause 4)
<b>5.1 Project planning</b>			
5.1	Tailoring by the customer	-	Will be described in S-ST-00-02
5.2	Project management Plan (PMP)	A	General guidelines in 4.1
<b>5.2 Project organization</b>			
5.2.1	Organization structure	Part of PMP	General guidelines in 4.2.1 & 4.2.2
5.2.2	Communication & reporting		General guidelines in 4.2.3
5.2.3	Audits		Basic guidelines in 4.2.4
<b>5.3 Project breakdown structures</b>			
5.3 a to g	Product tree	B	4.3.4
5.3 h to l	Work Breakdown Structures (WBS)	C	4.3.5, Annex H NOTE: WBS refers to Functional responsibilities
5.3 m to o	Work Packages Descriptions	D	4.3.6 NOTE: A Work Package is any WBS element that can be measured and managed for planning, monitoring and control
5.3 p to r	Organization Breakdown Structure (OBS)	Part of WBS	4.3.7 NOTE: OBS refers to contractual responsibilities
<b>5.4 Project phasing</b>			
5.4 a to d	Project phases & reviews (including criteria to next phase)	-	4.4






# 4 - ECSS M-standards content

## M-ST-10 (supporting material)

### Project Planning & Implementation



Fig 4-1:  
Product tree example

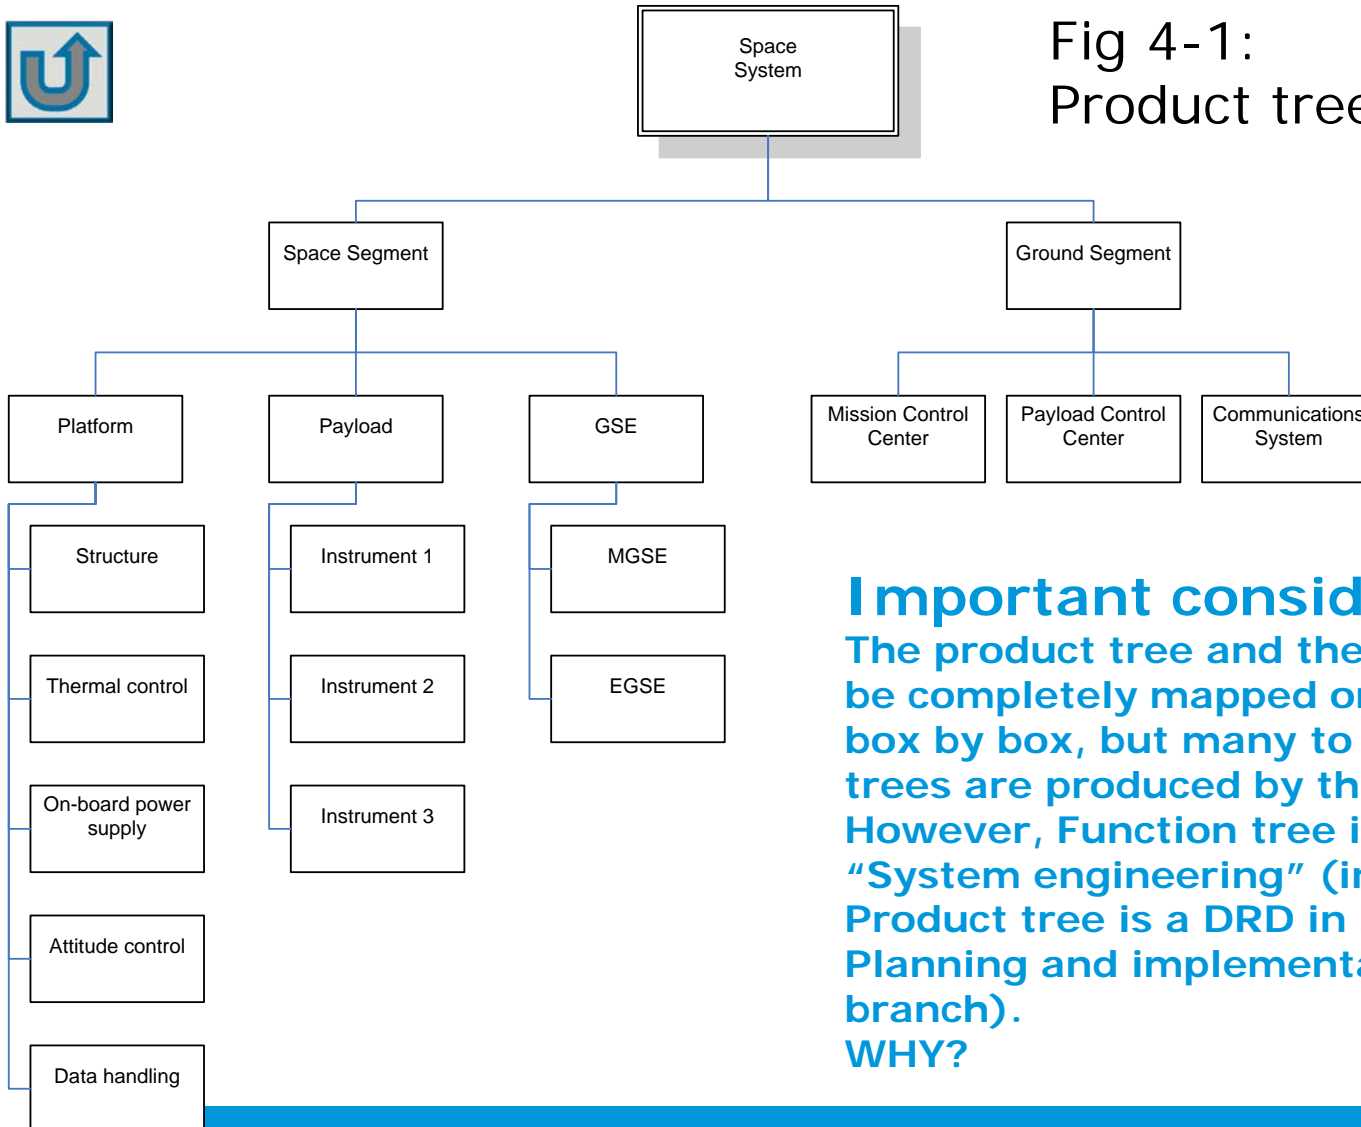

## Important consideration

The product tree and the Function tree shall be completely mapped one to the other (no box by box, but many to many). In fact, both trees are produced by the System Engineer. However, Function tree is a DRD in E-ST-10 "System engineering" (in the E branch), and Product tree is a DRD in M-ST-10 "Project Planning and implementation" (in the M branch).  
**WHY?**

# 4 - ECSS M-standards content

## M-ST-10 (supporting material)

### Project Planning & Implementation

Standardization  
training program  
Space Project Management

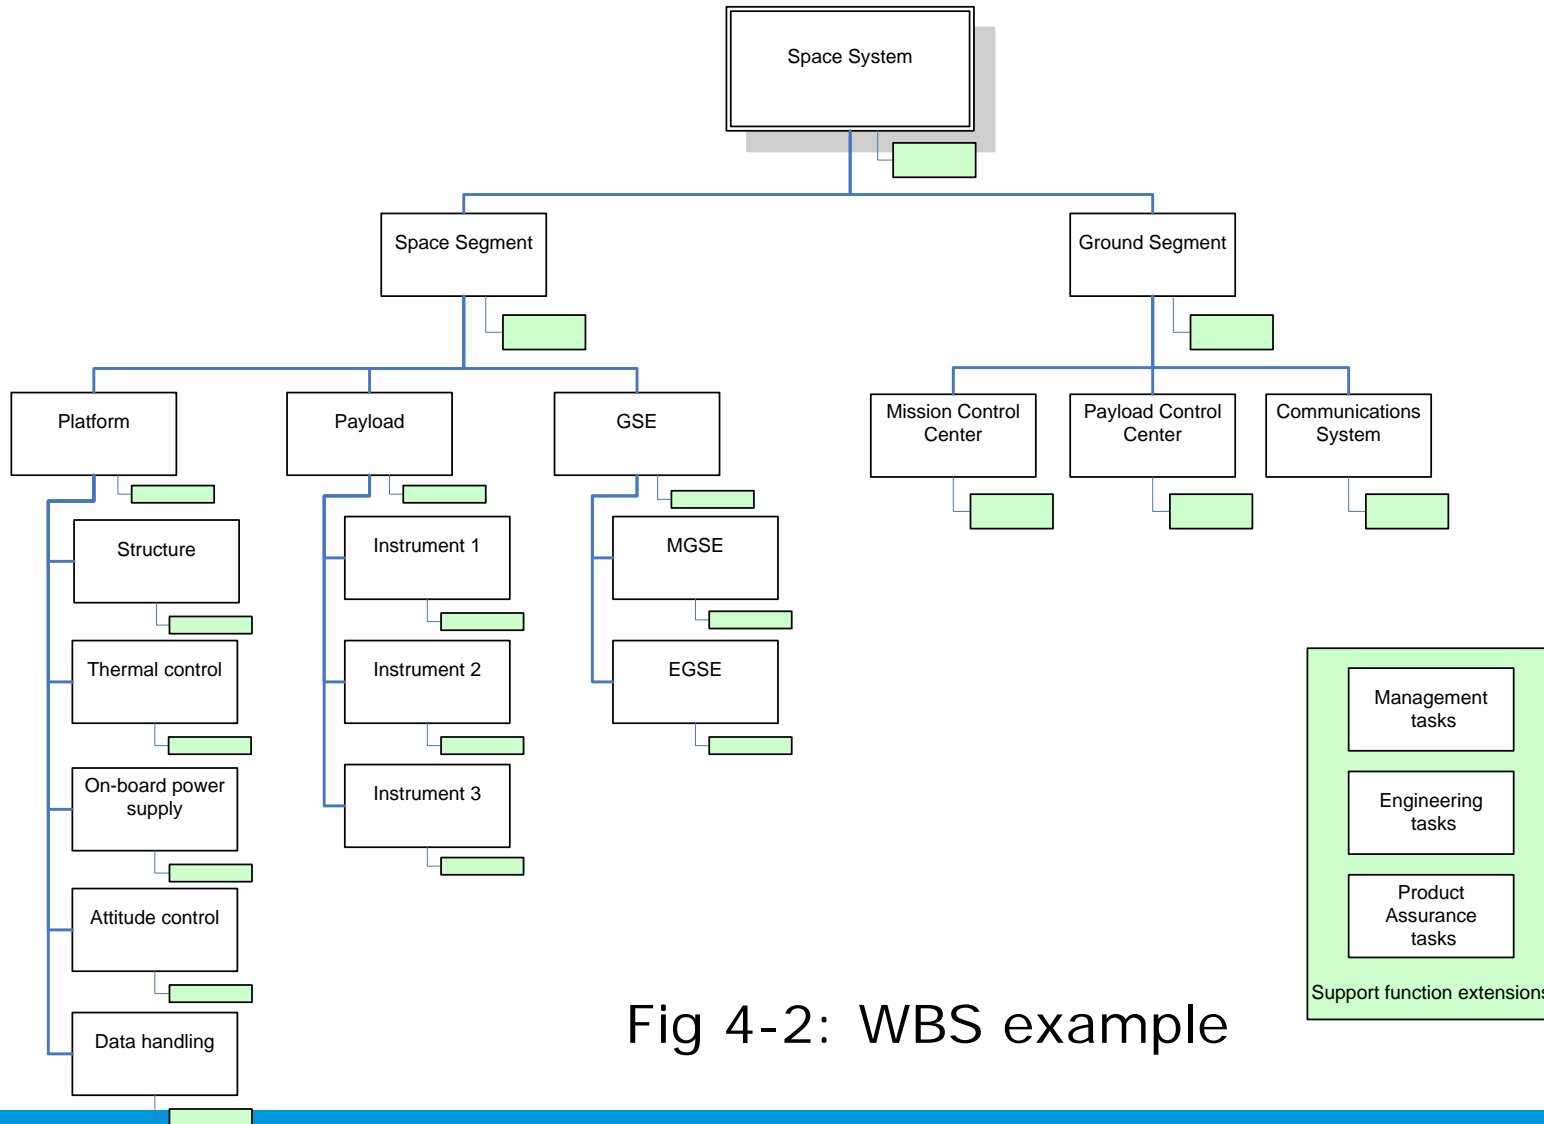


Fig 4-2: WBS example

# 4 - ECSS M-standards content

## M-ST-10 (supporting material)

### Project Planning & Implementation

Standardization  
training program  
Space Project Management



#### REVIEWS

- MDR=Mission Definition
- PRR=Preliminary req.
- SRR=System req.
- PDR=Preliminary design
- CDR=Critical design
- QR=Qualification
- AR=Acceptance
- ORR=Operational readiness
- FRR=Flight readiness
- LRR=Launch readiness
- CRR=Commissioning result
- ELR=End-of-life
- MCR=Mission close-out

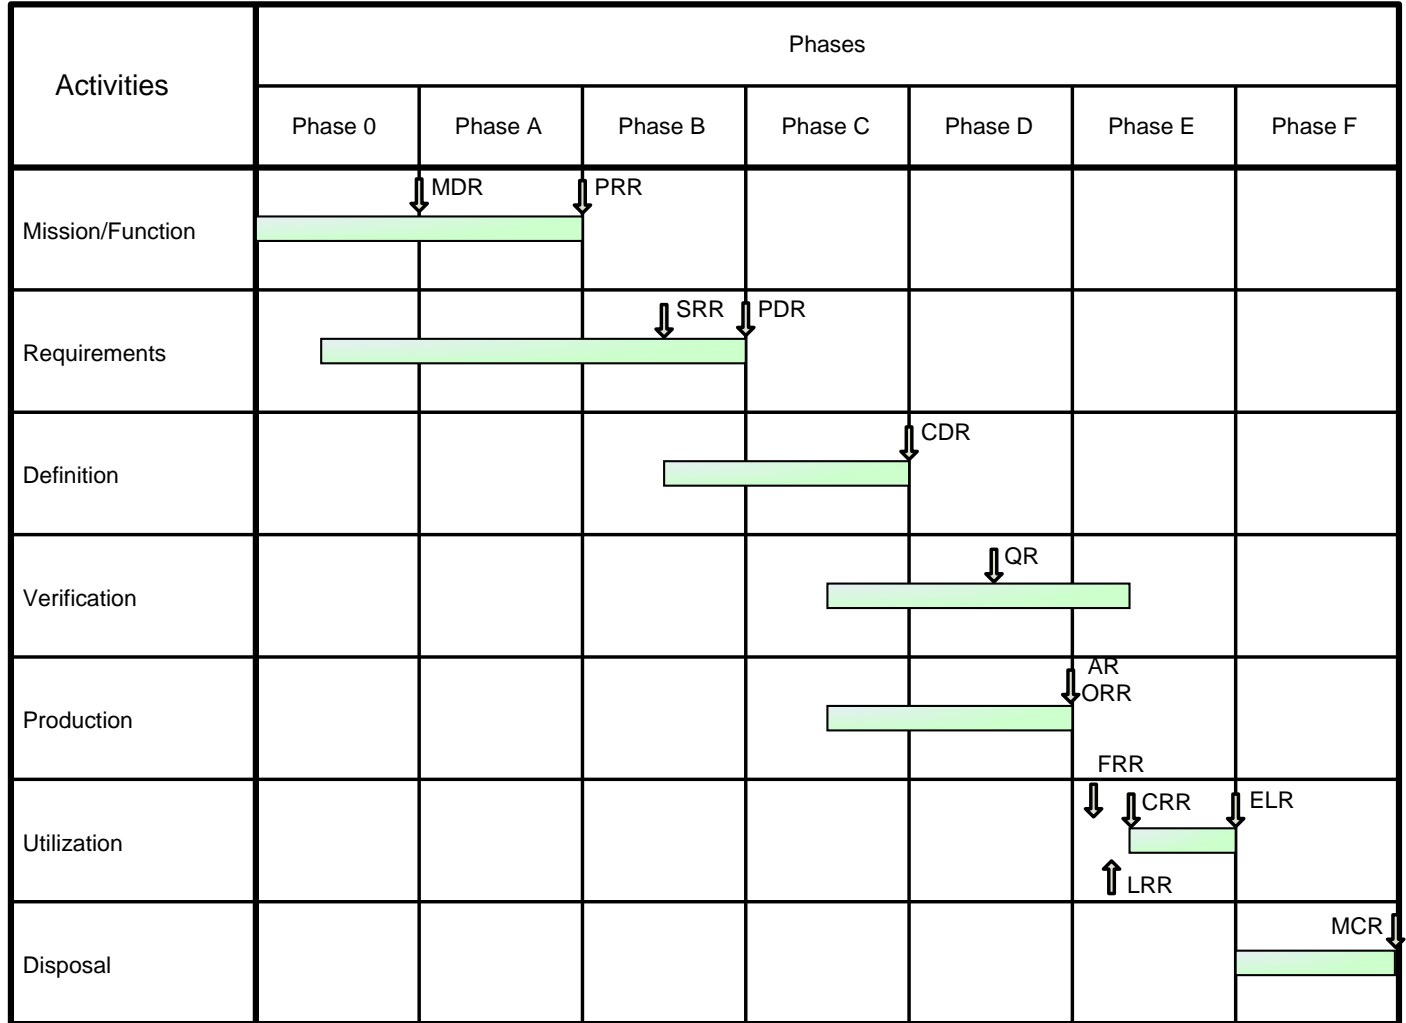


Fig 4-3: Typical project life-cycle

# 4 - ECSS M-standards content

## M-ST-10 (supporting material)

### Project Planning & Implementation

**Annex F is a very interesting informative annex**  
**It covers the MAIN DRDs in the M branch**  
 Table F-1: Management documents delivery per review

Document Title	Phase														DRD ref.
	O MDR	A PRR	B SRR PDR		C CDR	D QR AR		ORR	FRR	E LRR CRR		ELR	F MCR		
Project management plan		X	X	X											ECSS-M-ST-10 <sub>1</sub> Annex A
Product tree		X	X	X	X	X	X								ECSS-M-ST-10 <sub>1</sub> Annex B
Work breakdown structure		X	X	X											ECSS-M-ST-10 <sub>1</sub> Annex C
Work package description		X	X	X											ECSS-M-ST-10 <sub>1</sub> Annex D
Schedule	X	X	X	X	X	X	X	X	X						ECSS-M-ST-60 <sub>1</sub> Annex B
Cost estimate report		X	X	X											ECSS-M-ST-60 <sub>1</sub> Annex G
Configuration management plan		X	X	X											ECSS-M-ST-40 <sub>1</sub> Annex A
Configuration item list				X	X										ECSS-M-ST-40 <sub>1</sub> Annex B
Configuration item data list				X	X	X	X								ECSS-M-ST-40 <sub>1</sub> Annex C
As-built configuration list						X	X								ECSS-M-ST-40 <sub>1</sub> Annex D
Software configuration file				X	X	X	X								ECSS-M-ST-40 <sub>1</sub> Annex E
Configuration status accounting reports				X	X	X	X								ECSS-M-ST-40 <sub>1</sub> Annex F
Risk management policy document	X	X	X	X											ECSS-M-ST-80 <sub>1</sub> Annex A
Risk management plan	X	X	X	X											ECSS-M-ST-80 <sub>1</sub> Annex B
Risk assessment report		X	X	X	X	X	X	X	X						ECSS-M-ST-80 <sub>1</sub> Annex C

# 4 - ECSS M-standards content

## M-ST-10-01

### Organization & conduct of reviews

Standardization  
training program  
Space Project Management

Clause & Req	Topic (what reqs are addressing)	DRD (Annex)
<b>5.1 General – customer responsibilities, objective &amp; coverage documentation</b>		
<b>5.2 Review bodies – Review authority (consumer), review team, project team (customer &amp; supplier)</b>		
<b>5.3 Roles &amp; tasks</b>		
5.3.1	<b>Review authority (RA):</b> Approve procedure, endorse team recomm, make recomm to customer report findings	D (Review Authority Report)
5.3.2	<b>Customer:</b> Propose procedure, event organization, data management system	A (Review Procedure)
5.3.3	<b>Supplier:</b> Support the customer for: logistics, documentation, and RID responses/action schedule	
5.3.5	<b>Review team (RT):</b> Review doc, produce RIDs, assess RIDs responses, help with the report	B (RID content)
5.3.4	<b>Review team leader (RTL):</b> Confirm prerequisite, approve RIDs & dispo, produce the report	C (Review team report)
<b>5.4 Prerequisite conditions – defined in the procedure by the customer, and agreed by supplier</b>		
<b>5.5 Review meetings</b>		
5.5.1	<b>Prerequisite key point</b> - See above	
5.5.2	<b>K.O. meeting</b> – All bodies, for present the docs and authorize review	
5.5.3	<b>Coordination meeting</b> – As defined by RTL, for review inputs, release RIDs	
5.5.4	<b>Collocation meeting:</b> As defined by the RTL, for review RIDs, agree dispo, identify actions/dates	
5.5.5	<b>RT close-out meeting:</b> As defined by the RTL, for results, inputs to report, and major issues	
5.5.6	<b>RA meeting:</b> RA & RT, for “blessing” the review, endorse team recomm, make decisions, issue RA report	
<b>5.6 RID processing and A.I. follow-up –</b> Major & minor RIDs, originators informed, RID closed = dispo/action agreed, open RIDs to be dispo by RA INFO IN ANNEX E (Logic diagram for RID processing)		

RID = Review item discrepancy

# 4 - ECSS M-standards content

## M-ST-10-01

### Organization and conduct of reviews




1. Clause 5 contains all requirements related to Project Reviews. These cover:
  - a. General
  - b. Review Bodies
  - c. Roles and tasks (Review authority, customer, supplier, review team leader, and review team)
  - d. Prerequisites for holding a review
  - e. Review meetings (prerequisite key point, Kick-off meeting, co-ordination meeting, collocation meeting, review team closeout meeting, and review authority meeting)
  - f. RID processing

# 4 - ECSS M-standards content

## M-ST-40

### Configuration and information management

**NOTE 1: For general process descriptions see Figures 4-1, 4-4, 4-5, 4-7, and 4-8**

Clause & Req	Topic (and what reqs. Are addressing)	DRD (Annex)	Provided information (Clause 4)
<b>5.2 Configuration Management(CM) planning</b>			
5.2.1	<b>CM plan (CMP)</b> - (incl. info security & classification)	A	General guidelines in 4.1.2
5.2.2	<b>CM interfaces</b> - (with Proj mng, Eng, PA, IDM, ...)	-	4.2.2 
<b>5.3 Configuration management (CM) implementation</b>			
5.3.1	<b>Configuration identification</b> - (C.I. def, selection, baseline, marking, ...)	Part of CMP	4.3.2 & Annex K (C.I. Selection) 
	Configuration Item List (CIL)	B	
5.3.2	<b>Configuration control</b> - (Change proc, classif, dispo, ...)	Part of CMP	4.3.3 (change proc, classif, CCB...)
	Change request	G	
	Change proposal	H	
	RFD & RFW	I & J	
5.3.3	<b>Configuration status accounting</b>	Part of CMP	General guidelines in 4.3.4 (incl as-designed and as-build data lists)
	Conf. Status accounting report (incl. Docs, Drawings, RFW, RFD, CRs, ...)	F	
	As designed Conf Item Data List (CIDL)	C	
	SW Conf File (SCF)	E	
	As-build Conf. List	D	
5.3.4	<b>Configuration verification</b> - (AsBuilt<->AsDesign @ various reviews)	Part of CMP	
5.3.5	<b>Audits of the CM system</b>		
5.3.6	<b>C.M. for operational phases</b> – (Activities during phases E & F)		
5.3.7	<b>Implementation of info/doc management</b> (incl. creation, review, delivery, archiving, retrieval)		4.3.8 (including TDP) & Annex L (Tech data) Annex M (Digital Sign.) 

**NOTE 2: For correlation project phases and SW baselines see Figure 4-11**


IDM = Info & Doc management    CCB = Conf. Control Board    TDP = Technical data package

# 4 - ECSS M-standards content

## M-ST-40 (supporting material)

### Configuration and information management

Standardization  
training program  
Space Project Management

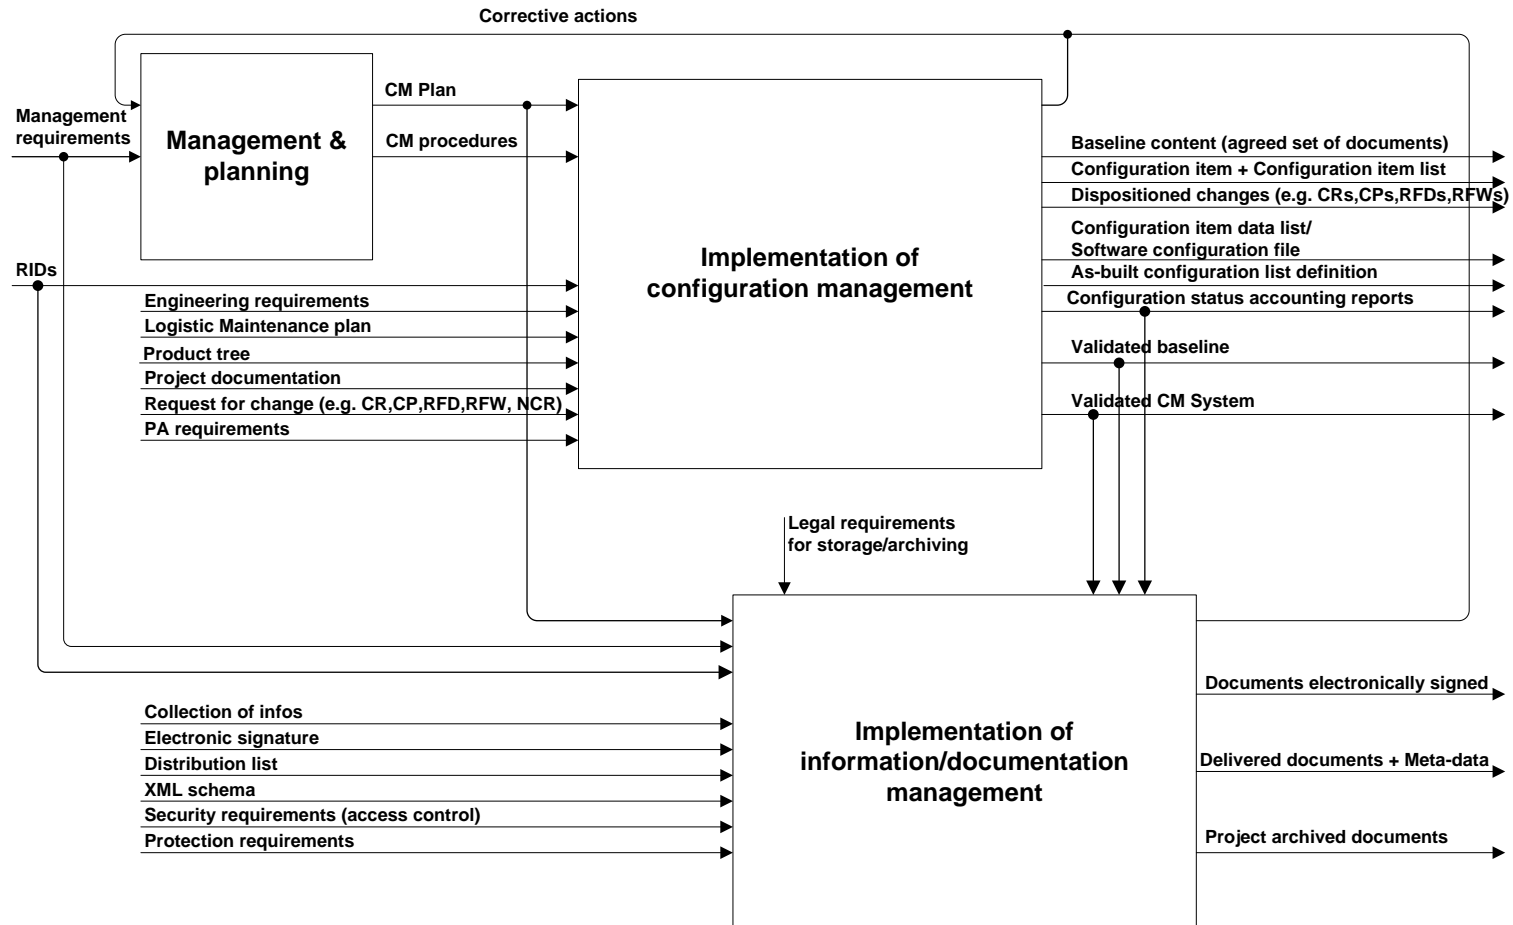

**NOTE to Fig 4-1:** Corrective actions are improvements on the process itself as a consequence of lessons learned and any feedback provided on the project

**Fig 4-1: Configuration management**




# 4 - ECSS M-standards content

## M-ST-40 (supporting material)

### Configuration and information management

Standardization  
training program  
Space Project Management

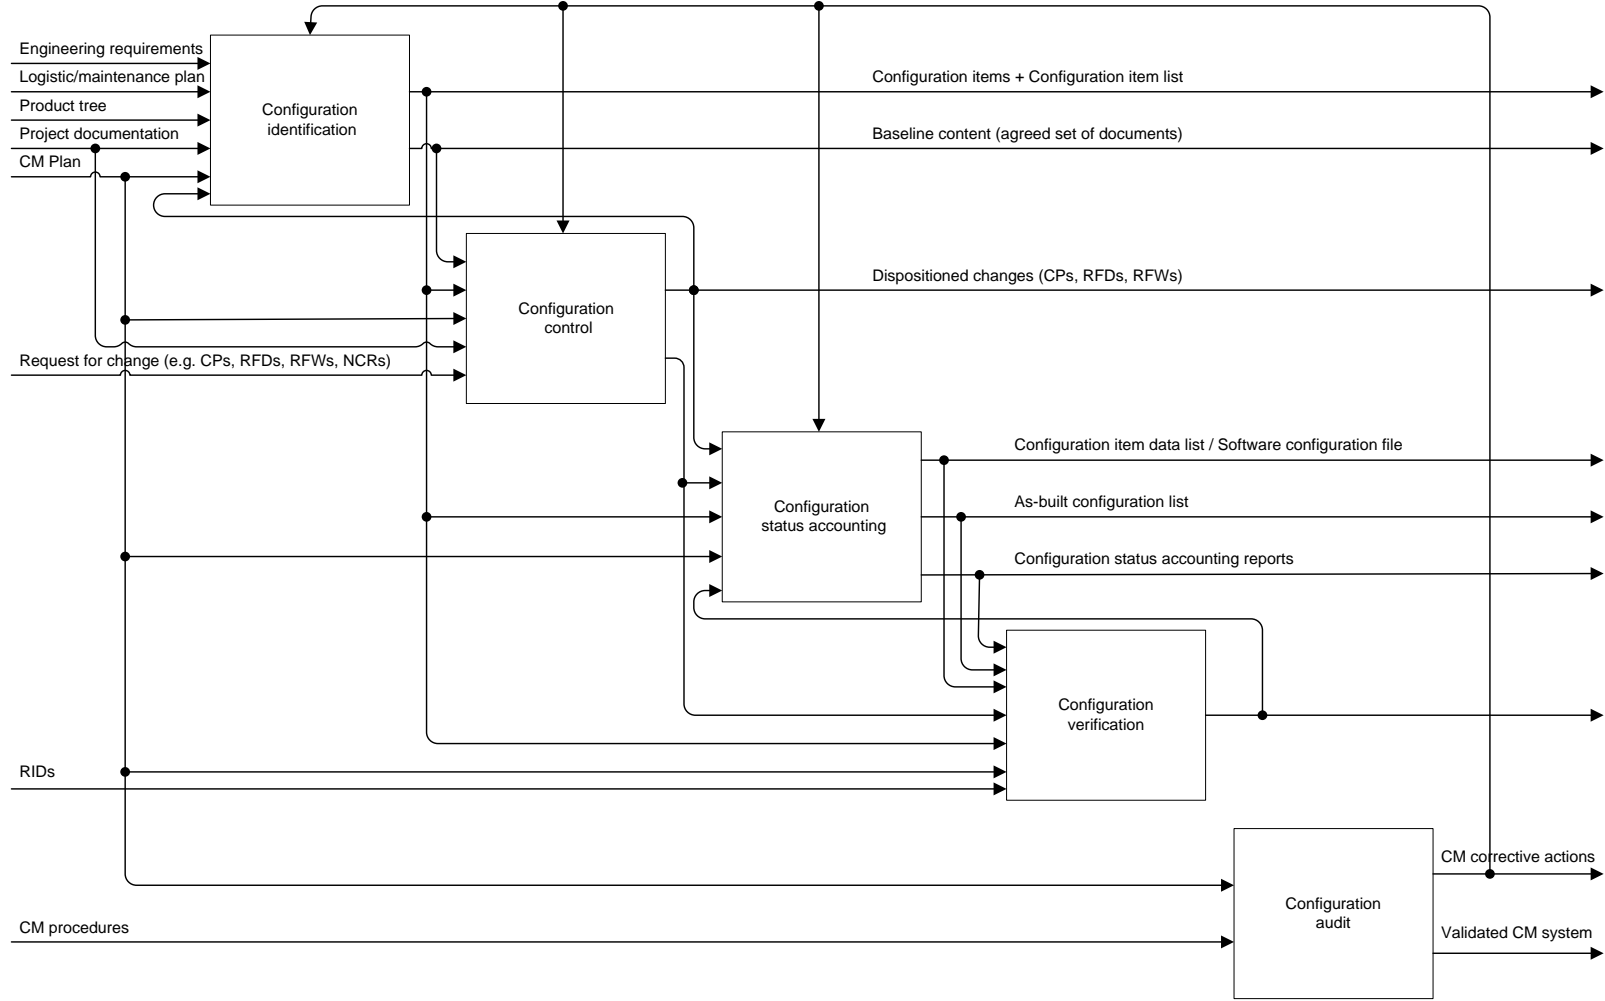


**Fig 4-4: Implementation of configuration management**

# 4 - ECSS M-standards content

## M-ST-40 (supporting material)

### Configuration and information management

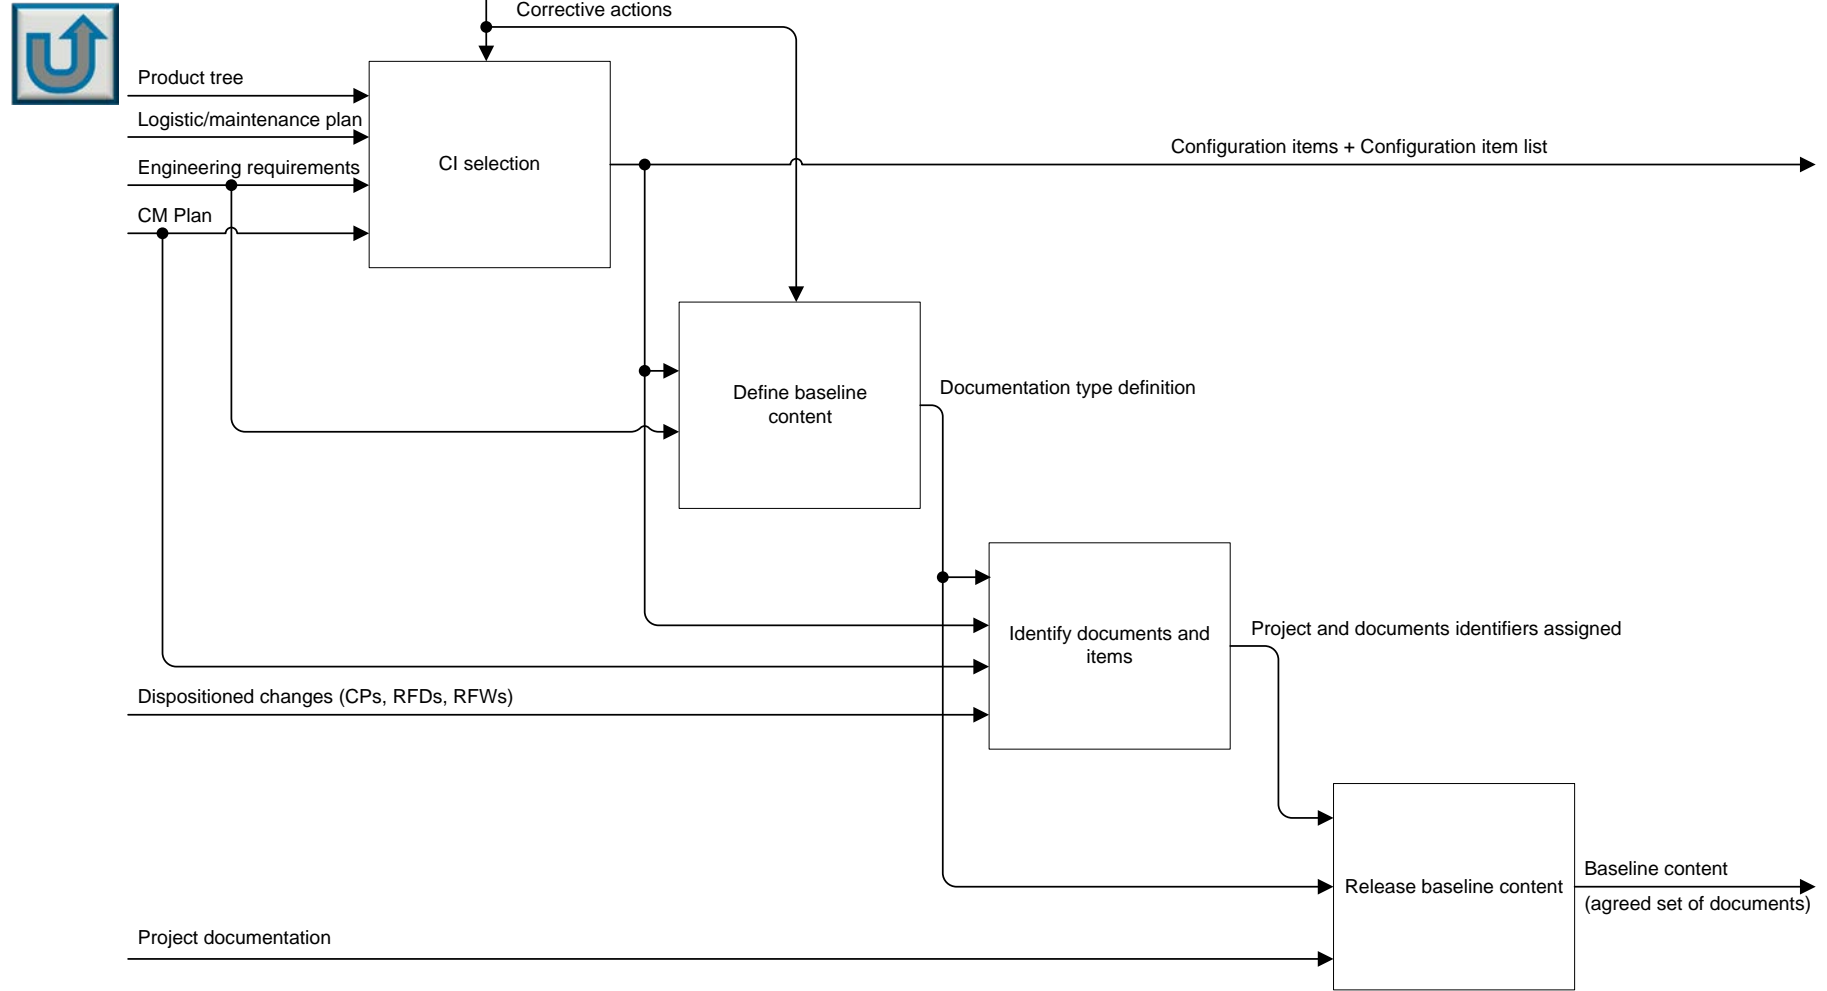


**Fig 4-5: Configuration identification**

# 4 - ECSS M-standards content

## M-ST-40 (supporting material)

### Configuration and information management

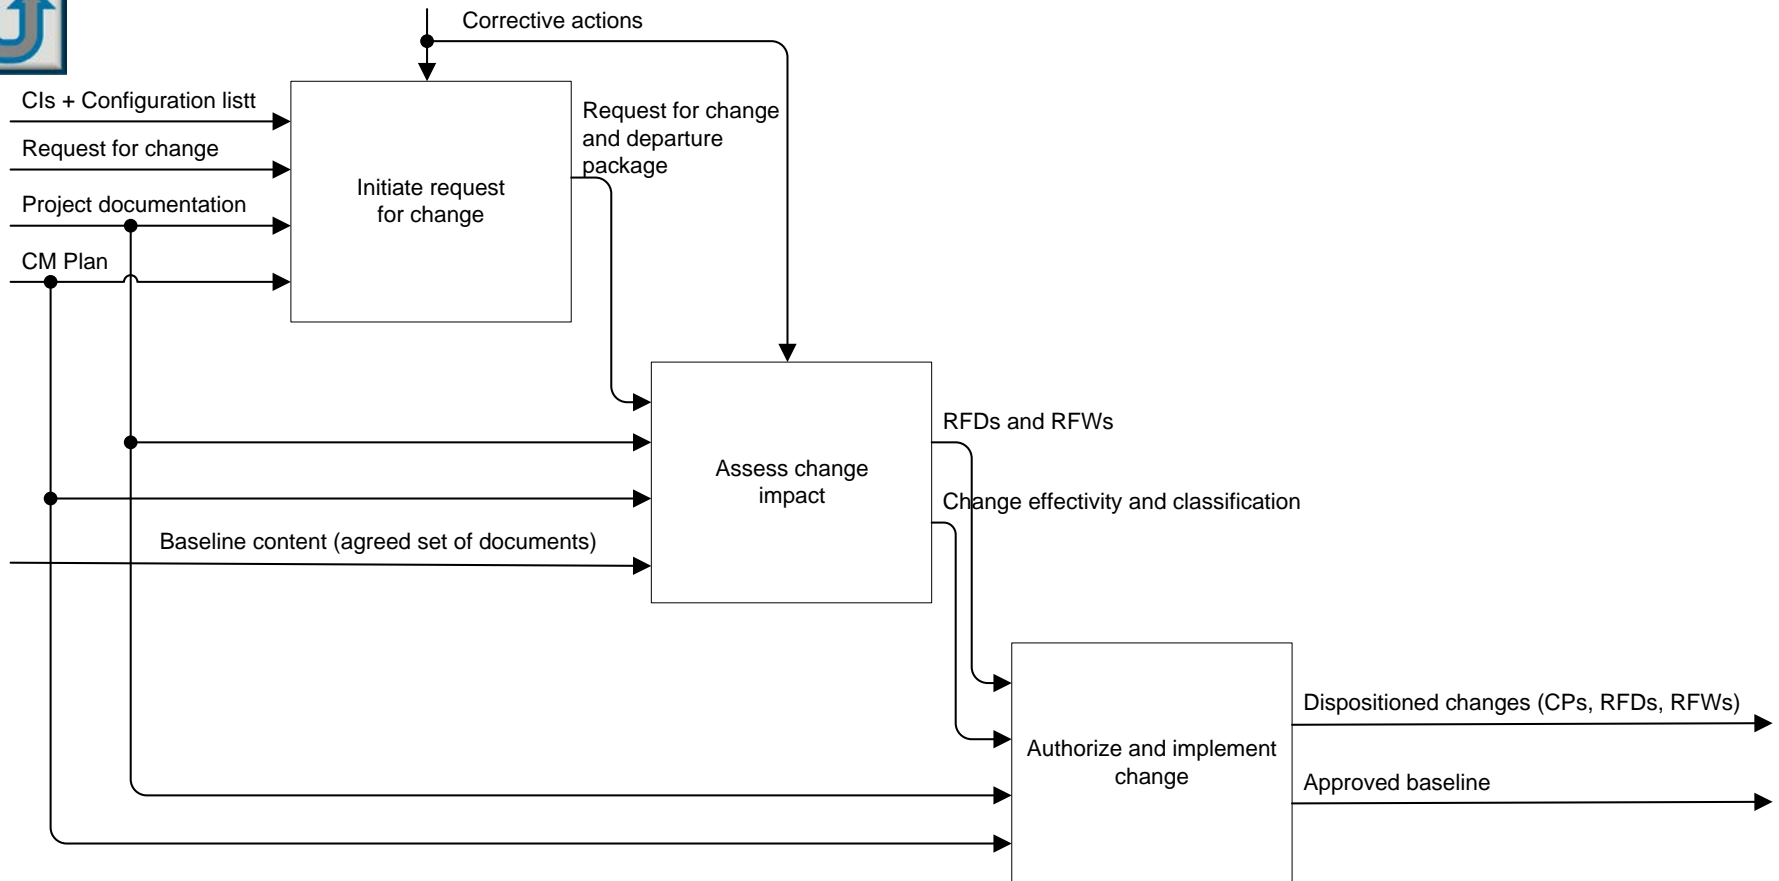


**Fig 4-7: Configuration control**

# 4 - ECSS M-standards content

## M-ST-40 (supporting material)

### Configuration and information management

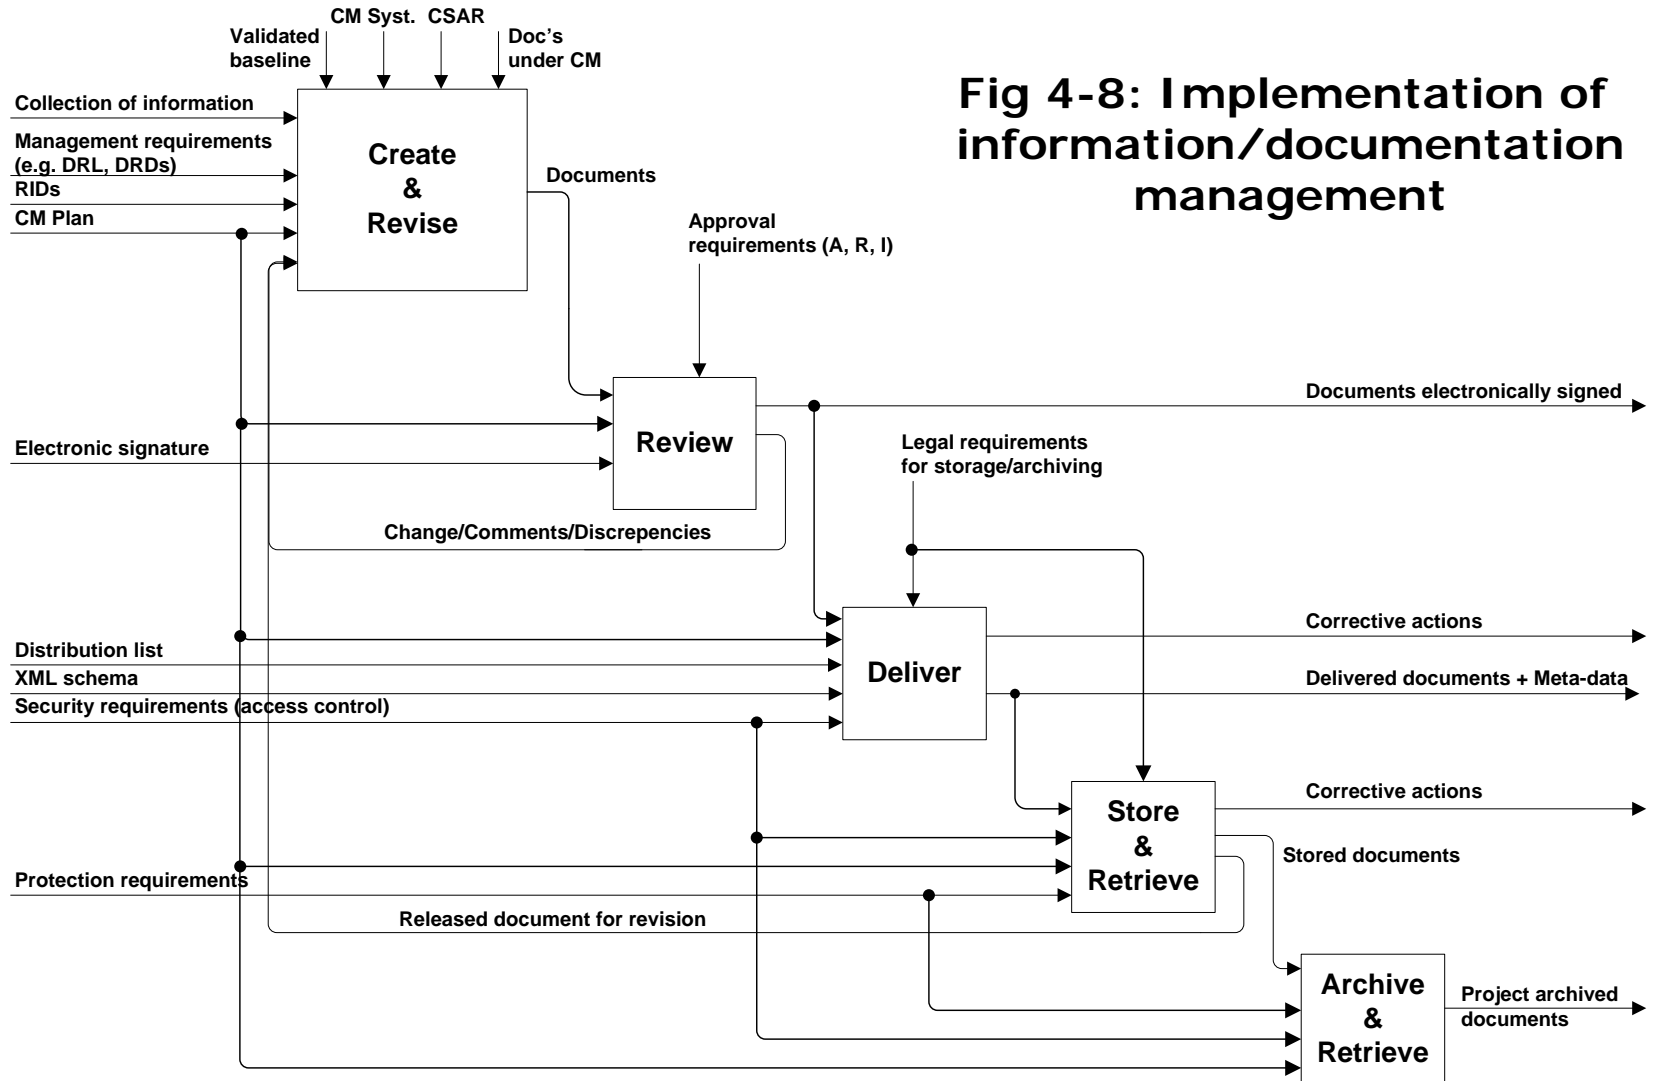

**Fig 4-8: Implementation of information/documentation management**

# 4 - ECSS M-standards content


## M-ST-40 (supporting material)

### Configuration and information management



Other project management activities

Management requirements and schedule  
Logistic/Maintenance plan  
Request for changes  
RIDs

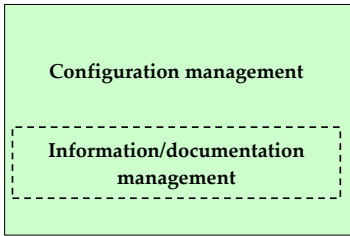

Engineering

Engineering requirements  
Product tree  
Request for changes  
Project documentation  
RIDs


Product assurance

Request for changes  
Project documentation  
RIDs

**Fig 4-2:  
C.M. interfaces (inputs)**

Product assurance

CI + Configuration item list  
Baseline content (agreed set of documents)  
Dispositioned changes (CPs, RFDs, RFWs)  
Configuration item data list/Software configuration file  
As-built configuration list definition  
Validated baseline  
Validated CM system  
Reliable and secure information

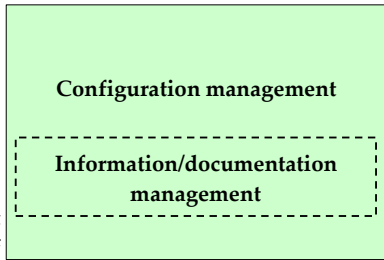

Engineering

CI + Configuration item list  
Baseline content (agreed set of documents)  
Dispositioned changes (CPs, RFDs, RFWs)  
Configuration item data list/Software configuration file  
Validated baseline  
Reliable and secure information

**Fig 4-3:  
C.M. interfaces (outputs)**

Other project management activities

CI + Configuration item list  
Dispositioned changes (CPs, RFDs, RFWs)  
Configuration status accounting reports  
Validated baseline  
CM proposed corrective actions  
Validated CM system

# 4 - ECSS M-standards content

## M-ST-40 (supporting material)

### Configuration and information management



Derived from Product Tree  
C.I. identification, by the customer  
Trade-off C.M.  $\leftrightarrow$  cost  
Annex K contains guidelines

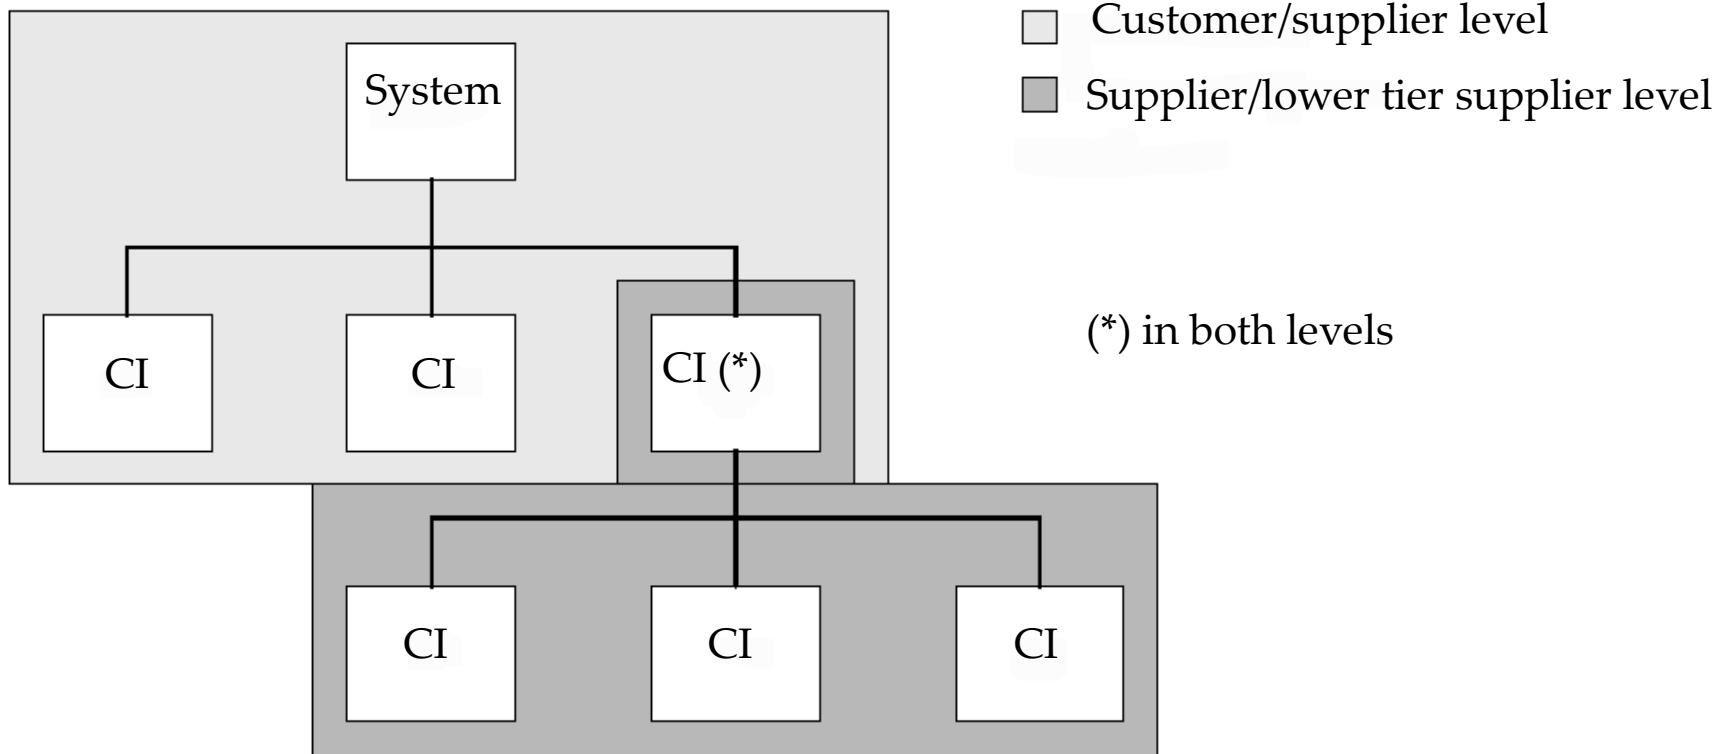



Fig 4-6: C.I. product tree structure

# 4 - ECSS M-standards content M-ST-40 (supporting material) Configuration and information management

Standardization  
training program  
Space Project Management



TDP format defines the way to exchange content files and their related metadata and the way to structure them within folders

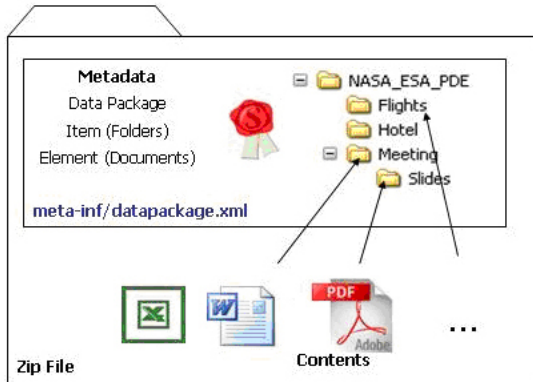

Metadata = Data about data

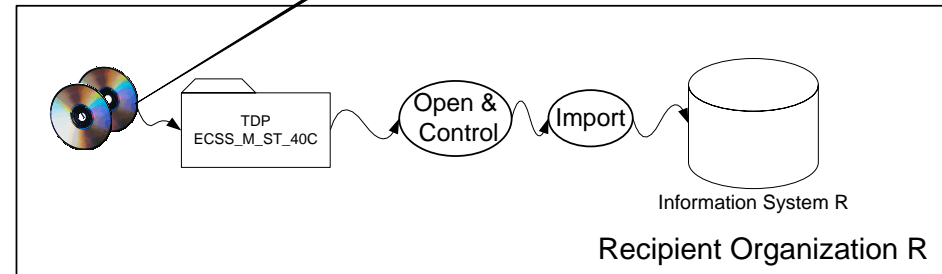
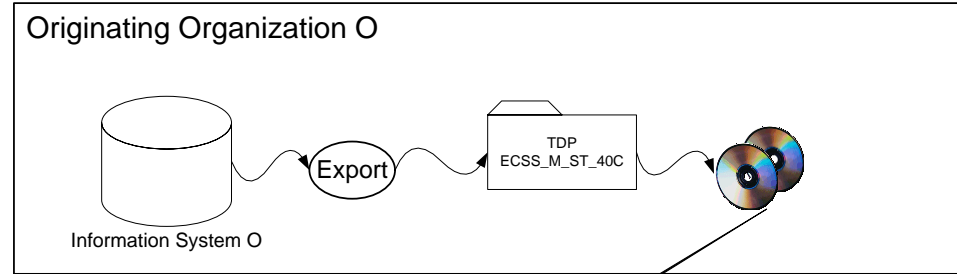


Fig 4-9: Technical Data Package (TDP) contents

Fig 4-10: Delivery process for TDP


# 4 - ECSS M-standards content

## M-ST-40 (supporting material)

### Configuration and information management

Standardization  
training program  
Space Project Management

- CI Configuration item
- DDR Detail design review (SW peculiar term)
- FCV Functional configuration verification (NASA: Functional config. audit (FCA))
- MDR Mission definition review
- PCV Physical configuration verification (NASA: Physical config. Audit (PCA))
- PDR Preliminary design review
- PRR Preliminary requirements review
- SRR System requirements review
- TR Test review
- TRR Test readiness review
- QR Qualification review

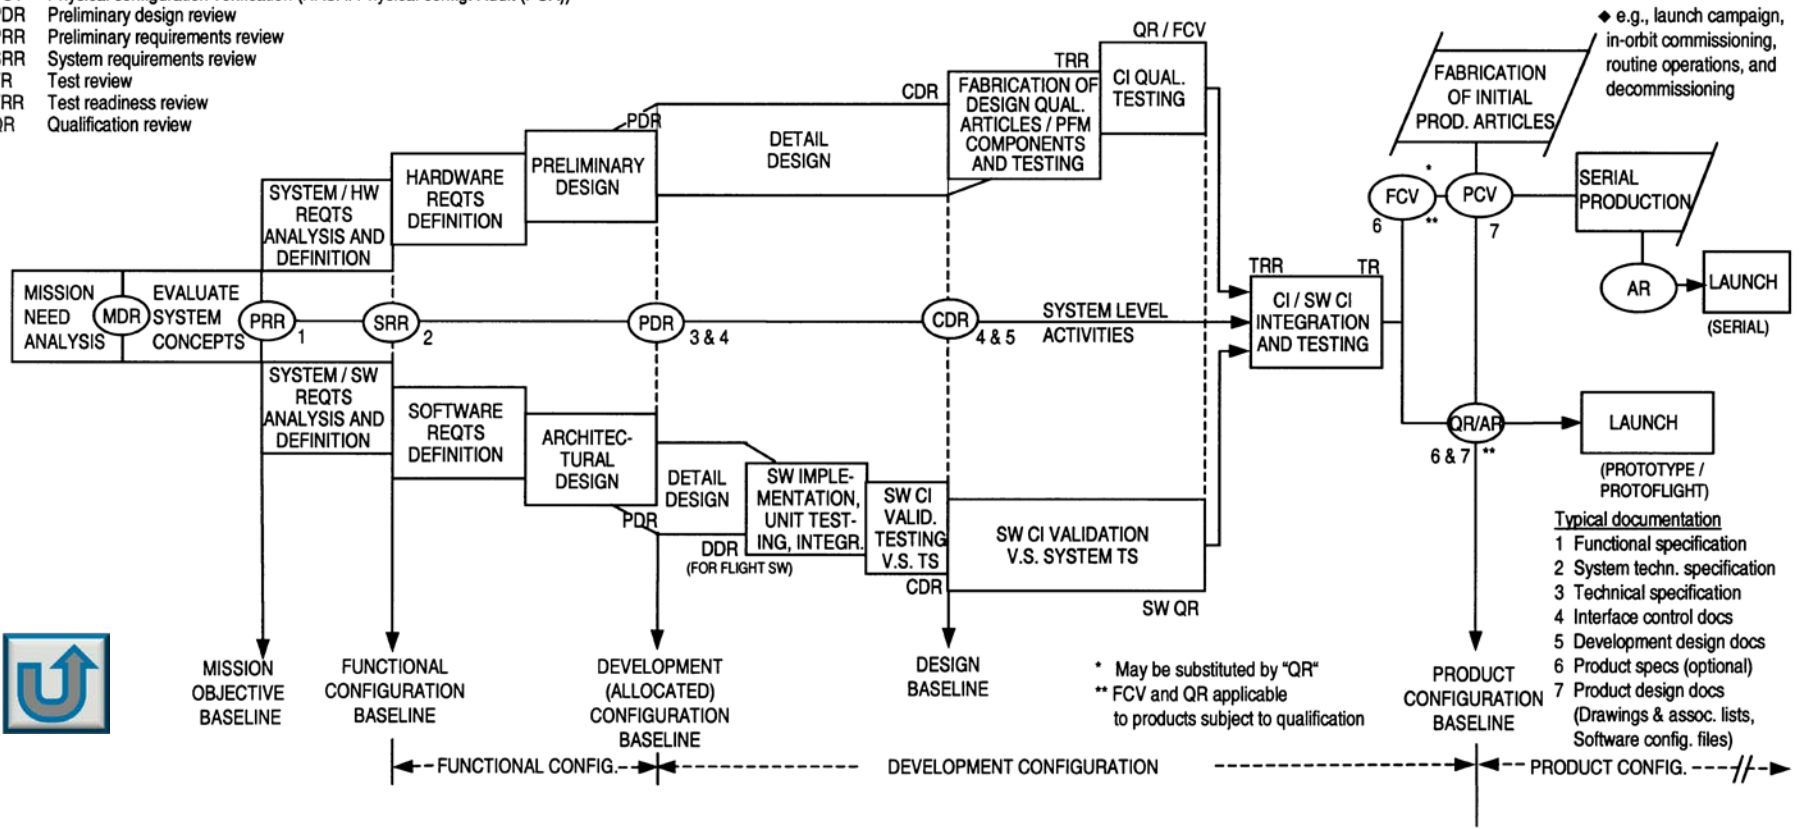






# 4 - ECSS M-standards content

## M-ST-60 [1/2]

### Cost and schedule (C&S) management

**NOTE 1: For general process descriptions see Figure 4-1**

Clause & Req	Topic (and what requirements are addressed)	DRD (Annex)	Provided information (Clause 4)
<b>7 - Cost &amp; schedule management common requirements</b>			
7.1	<b>Project structure</b>		
7.1.1	Cost breakdown structure (CBS) – Cost categories	A	Info in the DRD itself 
7.1.2	Business agreement structure (BAS)	-	Clause 4.2.3  See business agreement types in 4.3
7.1.3	Country/Company structure (CCS)	-	Normally combined with the BAS
7.2	<b>Risk management</b> - C&S contribution to Risk management (ECSS-M-80)	-	
<b>8 – Schedule management requirements</b>			
8.1	<b>Schedule definition</b> – Schedule, critical path, dependencies, calendar, KIP, MIP	-	Clause 5.1 
8.2	<b>Schedule control</b> – Baseline and actual schedule, performance measurement & evaluation, trends	B	Clause 5.2
8.3	<b>Schedule reporting</b>	C	

### Business agreement types

Fixed price		Cost reimbursement
Firm	Possibility of ceiling price	Cost + fixed price
With variation		Cost + incentive price
Fix unit price		Time & material

M/KIP = Main/Key inspection point

# 4 - ECSS M-standards content

## M-ST-60 [2/2]

### Cost and schedule (C&S) management

Clause & Req	Topic (and what requirements are addressed)	DRD (Annex)	Provided information (Clause 4)
<b>9 – Cost management requirements</b>			
<b>9.1</b>	<b>Contractual and financial interfaces</b>		
	9.1.1 Audited rates and cost structure – Approved and audited by national authority	-	Some info in 6.2
	9.1.2 Economic conditions (EC) – Cost info to be referred to the EC defined by customer	-	EC defined in 3.2.5 as “reference period of time during which a set of financial elements are applicable
	9.1.3 Currency & exchange rates	-	
	9.1.4 Contract change procedure - CCNs	O	Some info in 6.2.3
<b>9.2</b>	<b>Cost estimating and planning</b>		
	9.2.1 Cost estimating - Plan (Annex F) and Report (Annex G), proprietary data	F & G	Info in 6.3.1
	9.2.2 Project financial info – Company price breakdown form (CPBF)	D	
	9.2.3 Development cost plan (DCP) – based on Product Tree, WBS, CBS & CPBF	-	Some info in 6.3.2
	9.2.4 Milestone payment plan	H	Some info in 6.3.3
	9.2.5 Price variation mechanism – Supplier proposes, customer approves	-	Info in 6.3.4
	9.2.6 Geographic distribution – meeting the customer geog. distri. constraints	E	Some info in 6.3.5
<b>9.3</b>	<b>Cost control</b>		
	9.3.1 Original BCP (baseline cost plan) – BCP for cost reimbursement & Fixed price	K & L	Some info in 6.4.1
	9.3.2 Current baseline cost plan (CBCP) – Report on the update the OBCP	K & L	
	9.3.3 EstAC & EstTC – Report for cost reimb. (Annex M) and Fixed Price (Annex N)	M & N	Some info in 6.4.2
	9.3.4 Price variation mechanism control – Report on computation of 9.2.5	-	Some info in 6.4.3
	9.3.5 Geographical distribution control – Report on Actual distribution (see 9.2.6)	E	Some info in 6.4.4
	9.3.6 Inventory control – Inventory control plan	-	Info in 6.3.6 and 6.4.5
	9.3.7 Financial audits (for cost reimbursement) – Customer right to audit supplier	-	Some info in 6.4.6
	9.3.8 Payment milestone achievement – Way to certify & document payment	-	Some info in 6.4.7
<b>9.4</b>	<b>Cost management reporting</b>		
	9.4.1 Cost & manpower report (for cost reimbursement)	J	
	9.4.2 Inventory report	I	

# 4 - ECSS M-standards content

## M-ST-60 [Supporting material]

### Cost and schedule (C&S) management

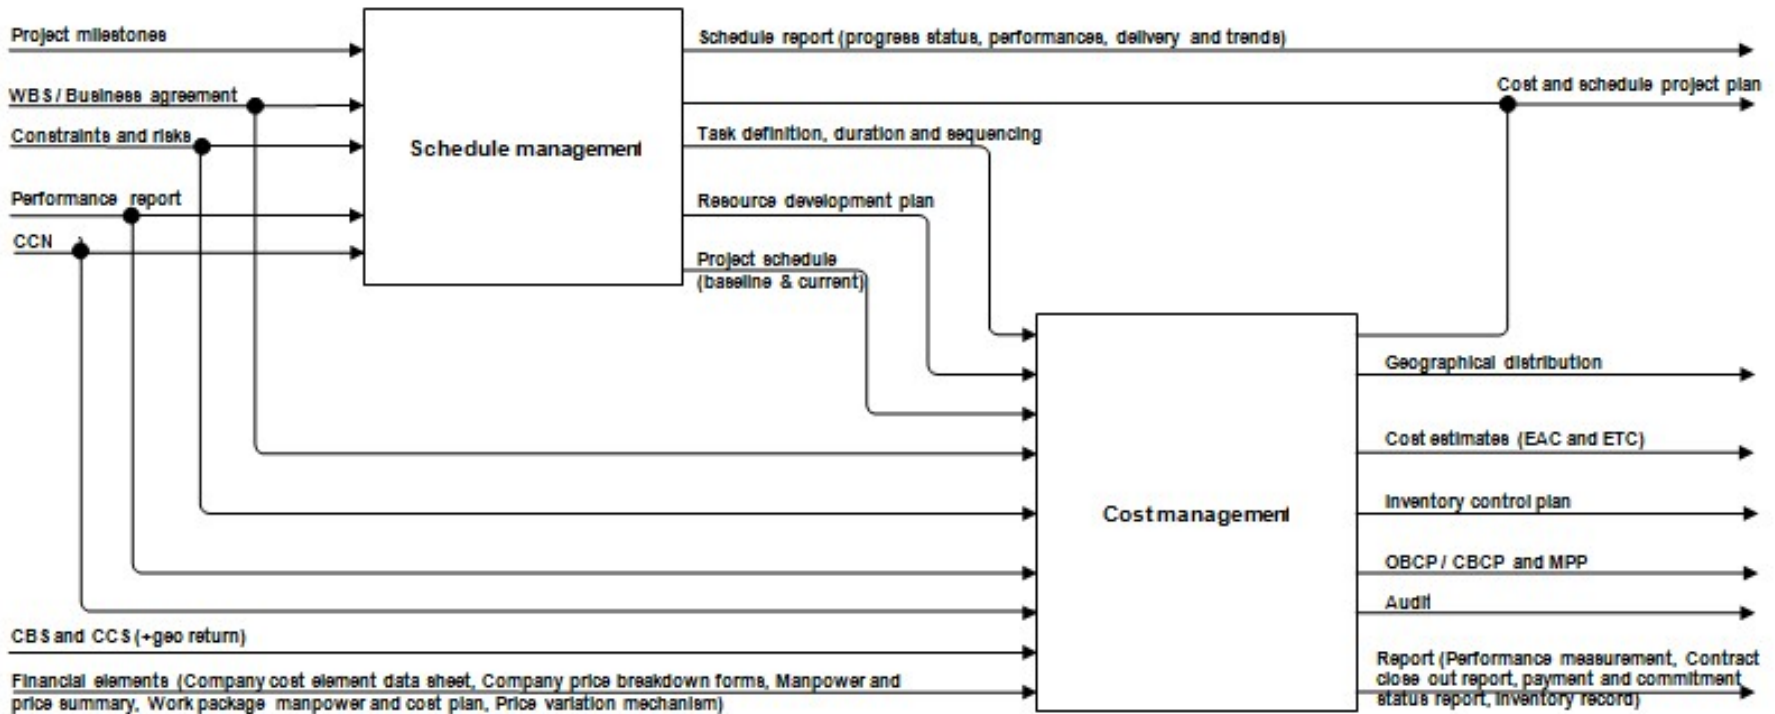


Fig 4-1:  
C&S overall functional analysis

# 4 - ECSS M-standards content

## M-ST-60 [Supporting material]

### Cost and schedule (C&S) management

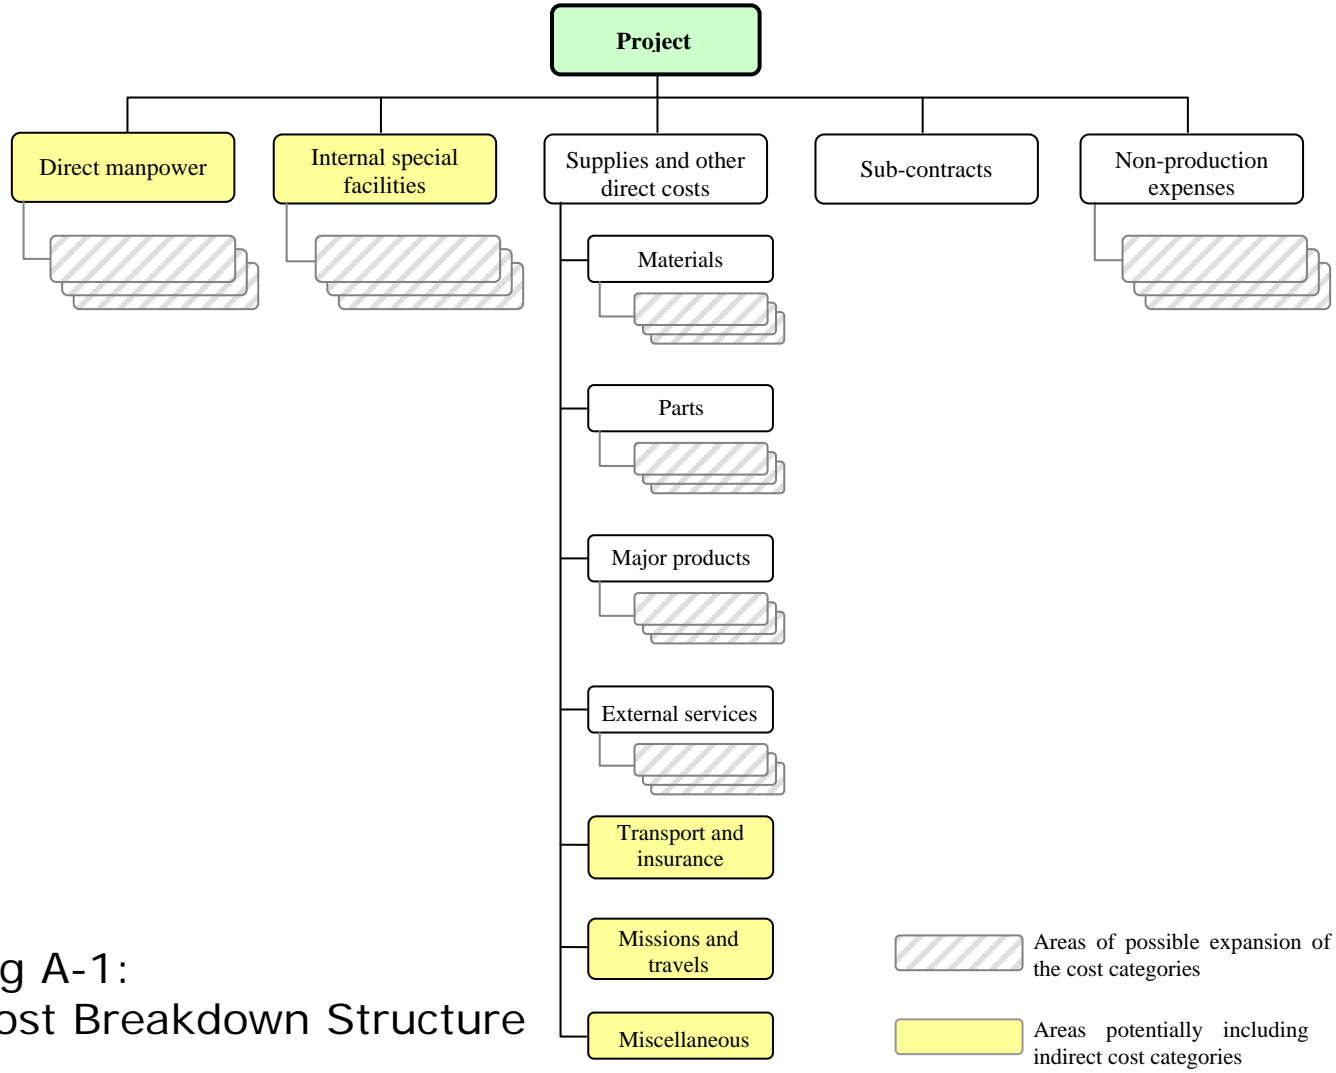


Fig A-1:  
Cost Breakdown Structure

# 4 - ECSS M-standards content

## M-ST-60 [Supporting material]

### Cost and schedule (C&S) management


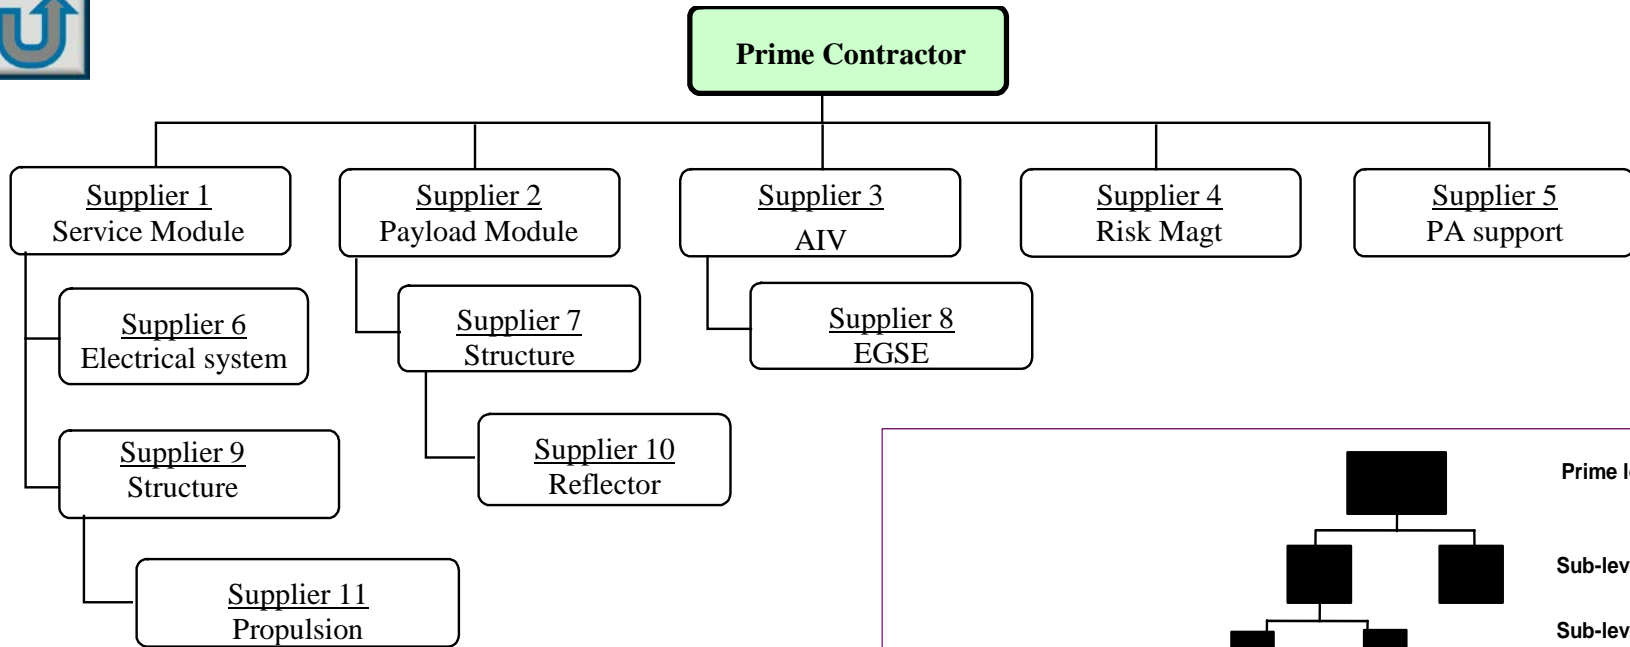


Fig 4-2:  
Business agreement structure example

Fig 4-3:  
Business agreement structure schematic

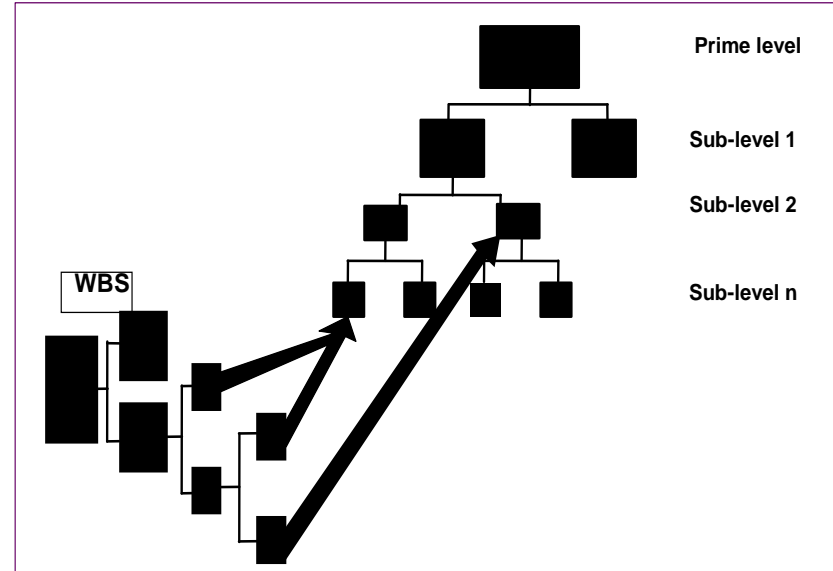

# 4 - ECSS M-standards content M-ST-60 [Supporting material] Cost and schedule (C&S) management

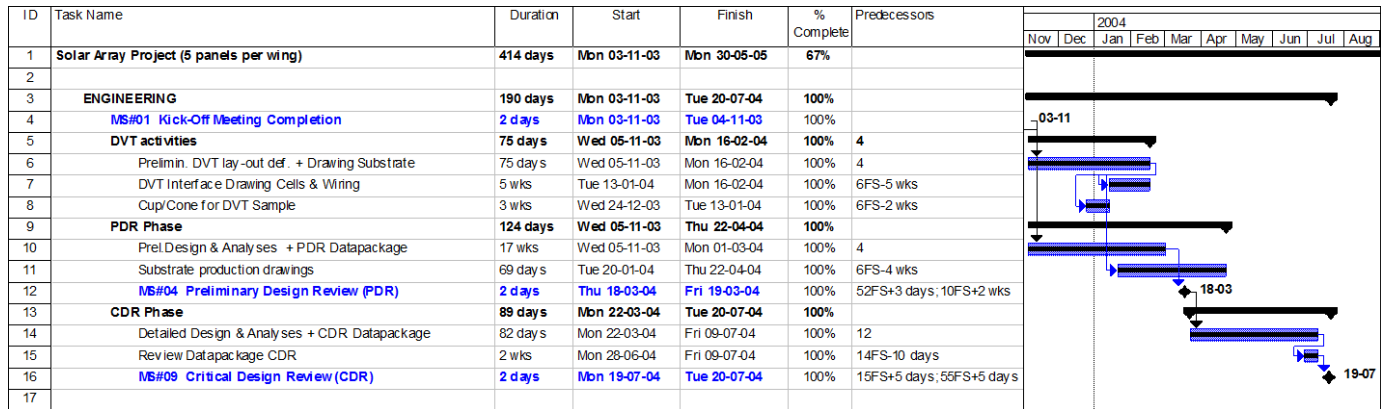


Fig 5-1: Gantt char example (for performance evaluation)


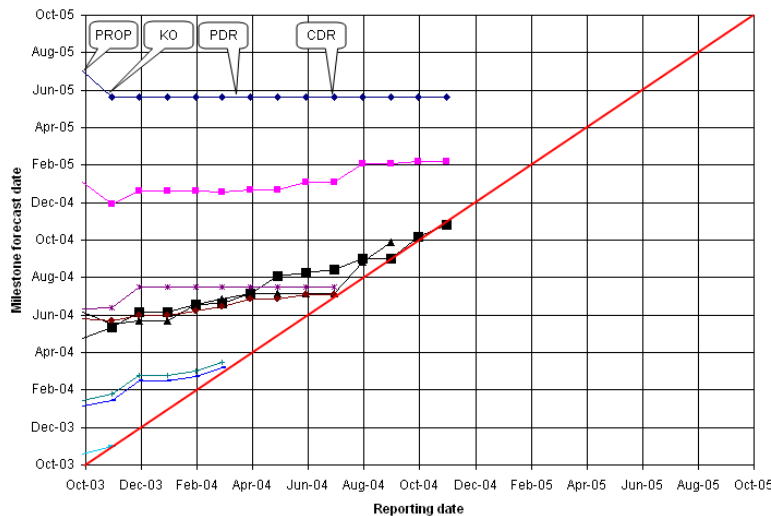


Fig 5-2: Milestone trend chart example



Milestone	Baseline	Current	
Finish of development	1/ Jun 04	8/ Jun 04	Yellow circle
Design review	1/ Nov 04	10/ Oct 04	Green circle
Start manufacturing	1/ Feb 05	25/ Jan 05	Yellow circle
Delivery	1/ Jul 05	20/ Aug 05	Red circle

Fig 5-3: Milestone list example

# 4 - ECSS M-standards content

## M-70A

### Integrated Logistic Support (ILS)





1. This ECSS **issue A** standard provides the guidelines and requirements to prepare for, and support, the operation and maintenance of a product during its operational life
2. The need for an integrated logistics system is usually associated with human spaceflight projects and projects involving reusable and/or production spacecraft where human intervention can be used to upgrade and maintain the space element(s) of the system.
3. The requirements provided are mainly covering:
  - a. Logistics analysis
  - b. Spares provisioning
  - c. Maintenance planning

**Note:** *Need is identified to update the standard (some preliminary activities are on-going) => the document is mostly used as a guideline*

# 4 - ECSS M-standards content

## M-ST-80

### Risk management

Clause & Req	Topic (and what requirements are addressed)	DRD (Annex)	Provided information (Clause 4)
<b>7 – Risk management requirements</b>			
<b>7.2</b>	<b>Risk management process</b>		
	<b>7.2.1 Risk policy</b> <ul style="list-style-type: none"> <li>- Resources, goals &amp; constraints</li> <li>- Strategy, approach and goal ranking</li> <li>- Risk scoring and index scheme, and action criteria</li> <li>- Decision</li> <li>- Communication and monitorization</li> </ul>	A	Info in 5.1 Info in 5.1 and 5.2.1 Info in 5.2.1 and 5.2.2 Info in 5.2.3 Info in 5.2.4   
	<b>7.2.2 Risk management plan (RMP)</b> <ul style="list-style-type: none"> <li>- Organization and responsibilities</li> <li>- Decision, criteria and tools</li> <li>- Documentation and processes</li> </ul>	B	Info and guidelines in 6.2 and 6.3 Info in 6.4 Info in 6.5
	7.2.3 to 7.2.5 Risk scenarios – To be identified, assessed & analyzed for acceptability		Risk register example in Annex D 
	7.2.6 Risk reduction – i.a.w. the risk policy in Annex A		
	7.2.7 Determination of reduced risk – To understand the impact of mitigation actions		
	7.2.8 Resolved, acceptable & overall risk assessment – i.a.w. RMP (Annex B)		
	7.2.9 Unresolved risk – Disposed as in the RMP (Annex B)		
	7.2.10 Residual risk – Accepted/disposed as in the RMP (Annex B)		
	7.2.11 Risk report	C	
<b>7.3</b>	<b>Risk management implementation</b>		
	7.3.1 Risk implementation (at any level customer-supplier) and integration		Summary: Implement your RMP
	7.3.2 Cost effective, at project level		
	9.3.3 Risk management process - to be monitored		
	9.3.5 Lessons Learnt on Risk management - to be performed		



# 4 - ECSS M-standards content

## M-ST-80 [Support material]

### Risk management

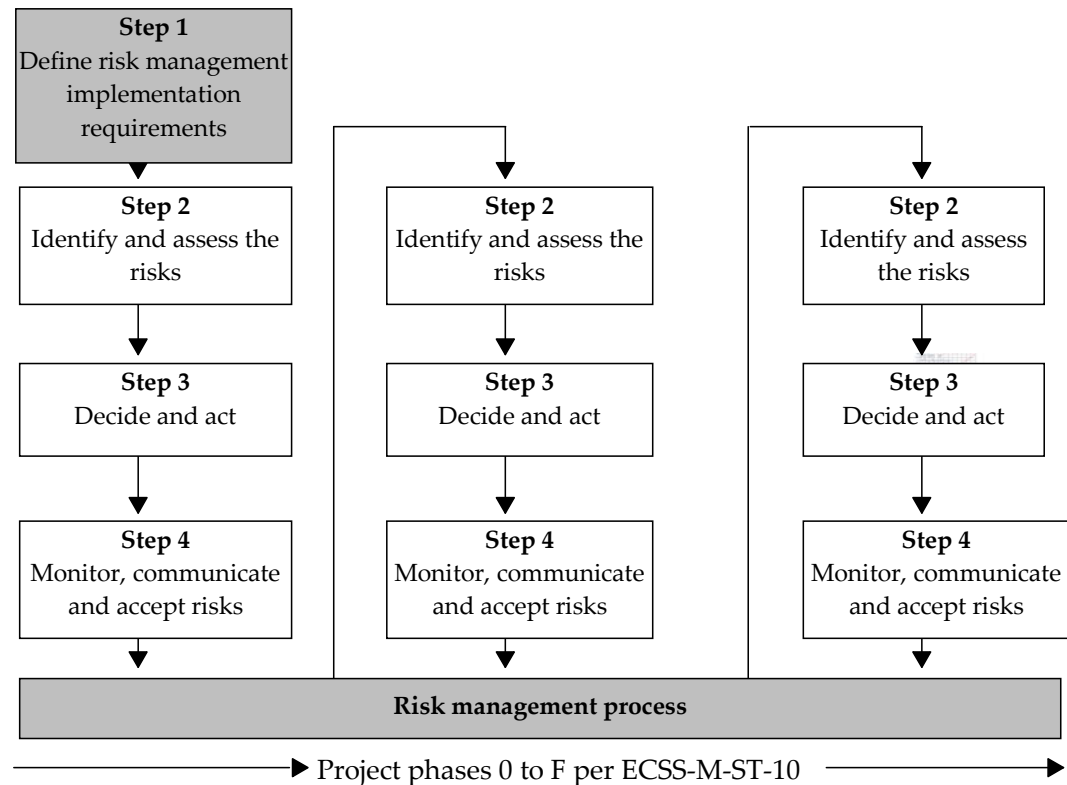
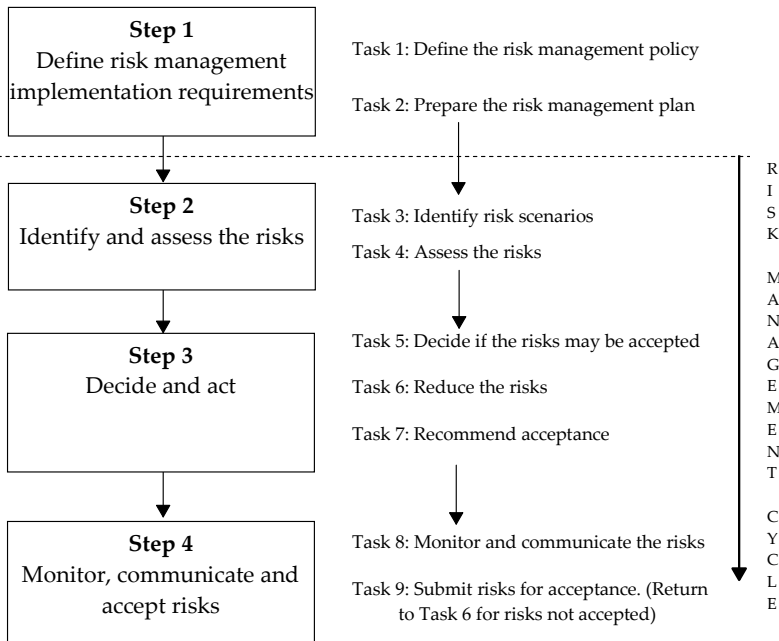


Fig 5-2:  
Task associated to the steps

Fig 5-1:  
Steps & cycles in the risk management process

# 4 - ECSS M-standards content

## M-ST-80 [Support material]

### Risk management



Score	Severity	Severity of consequence: impact on (for example) cost
5	Catastrophic	Leads to termination of the project
4	Critical	Project cost increase > tbd %
3	Major	Project cost increase > tbd %
2	Significant	Project cost increase < tbd %
1	Negligible	Minimal or no impact

Fig 5-3: Example of a severity-of-consequence scoring scheme

Score	Likelihood	Likelihood of occurrence
E	Maximum	Certain to occur, will occur one or more times per project
D	High	Will occur frequently, about 1 in 10 projects
C	Medium	Will occur sometimes, about 1 in 100 projects
B	Low	Will seldom occur, about 1 in 1000 projects
A	Minimum	Will almost never occur, 1 of 10 000 or more projects

Fig 5-4: Example of likelihood scoring scheme

Likelihood

Risk Index: Combination of Severity and Likelihood

	1	2	3	4	5	Severity
E	Low	Medium	High	Very High	Very High	
D	Low	Low	Medium	High	Very High	
C	Very Low	Low	Low	Medium	High	
B	Very Low	Very Low	Low	Low	Medium	
A	Very Low	Very Low	Very Low	Very Low	Low	

"Red"
  "Yellow"
  "Green"

Fig 5-5: Example of risk index & magnitude scheme

Risk index	Risk magnitude	Proposed actions
E4, E5, D5	Very High risk	Unacceptable risk: implement new team process or change baseline – seek project management attention at appropriate high management level as defined in the risk management plan.
E3, D4, C5	High risk	Unacceptable risk: see above.
E2, D3, C4, B5	Medium risk	Unacceptable risk: aggressively manage, consider alternative team process or baseline – seek attention at appropriate management level as defined in the risk management plan.
E1, D1, D2, C2, C3, B3, B4, A5	Low risk	Acceptable risk: control, monitor – seek responsible work package management attention.
C1, B1, A1, B2, A2, A3, A4	Very Low risk	Acceptable risk: see above.

Fig 5-6: Example of risk magnitude designation & proposed actions for individual risks

# 4 - ECSS M-standards content

## M-ST-80 [Support material]

### Risk management

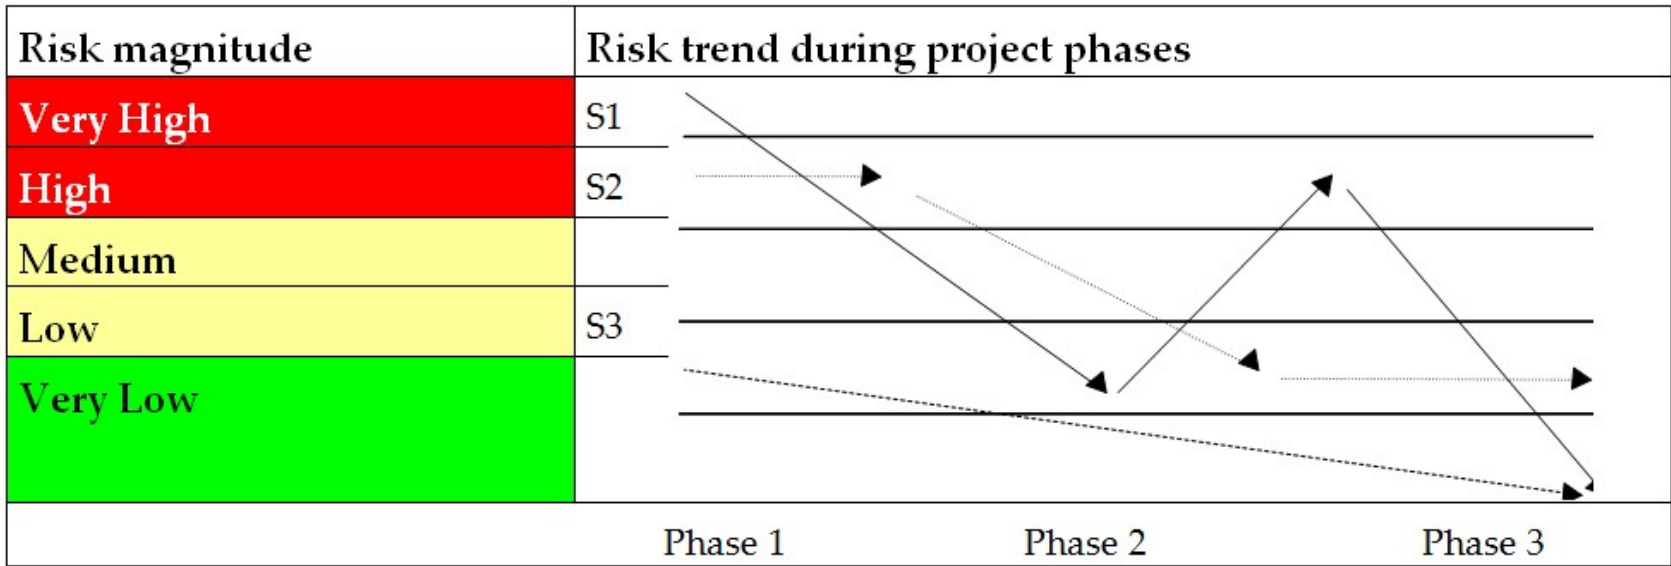


Fig 5-7: Example of a risk trend

# 4 - ECSS M-standards content

## M-ST-80 [Support material]

### Risk management



RISK REGISTER (Example)														
Project: WBS Ref.:				Organization:					Source: Controlled by: Supported by:			Date: Issue:		
RISK SCENARIO and MAGNITUDE														
No.	Risk scenario title:													
Cause and consequence:														
Severity (S)					Likelihood (L)					Risk index	RED	YELLOW	GREEN	Risk domain
Negligible 1	Significant 2	Major 3	Critical 4	Catastrophic 5	Minimum A	Low B	Medium C	High D	Maximum E	(*)	(*)	(*)	(**)	
RISK DECISION and ACTION														
Accept risk <input type="checkbox"/>							Reduce risk <input type="checkbox"/>							
Risk reduction measures:				Verification means:			Expected risk reduction (severity, likelihood, risk index):							
Action:							Status:							
Agreed by project management:												Risk rank:		
Name:				Signature:										
Date:														
Project:				Organization:					Date: Issue:					
Rank	No.	Risk scenario title			Red	Yellow	Green	Risk domain	Actions and status					
					(*)	(*)	(*)	(**)						


Annex D:  
Example of  
risk register

# 4 - ECSS M-standards content

## DRDs General picture



- ABCL – As-built configuration list
- BAS – Business agreement structure
- BCP – Baseline cost plan
- C&MPR – Cost & manpower report
- CBS – Cost breakdown structures
- CCS – Company/country structure
- CEP – Cost estimation plan
- CER – Cost estimate report
- CIDL – Configuration item data list
- CIL – Configuration item list
- CMP – Configuration management plan
- CPBF – Company price breakdown form
- CSAR – Configuration status accounting report
- CSMP – Cost & schedule management plan
- DDF – Design definition file
- ICP – Inventory control plan
- MPP – Milestone payment plan
- O&C – Original and current
- PAP – Product assurance plan
- PMP – Project management plan
- PT – Product tree
- RFD – Request for deviation
- RFW – Request for waiver
- RMPP - Risk management policy & plan
- SCF – SW configuration file
- SEP – System engineering plan
- WBS – Work breakdown structures
- WP – Work package

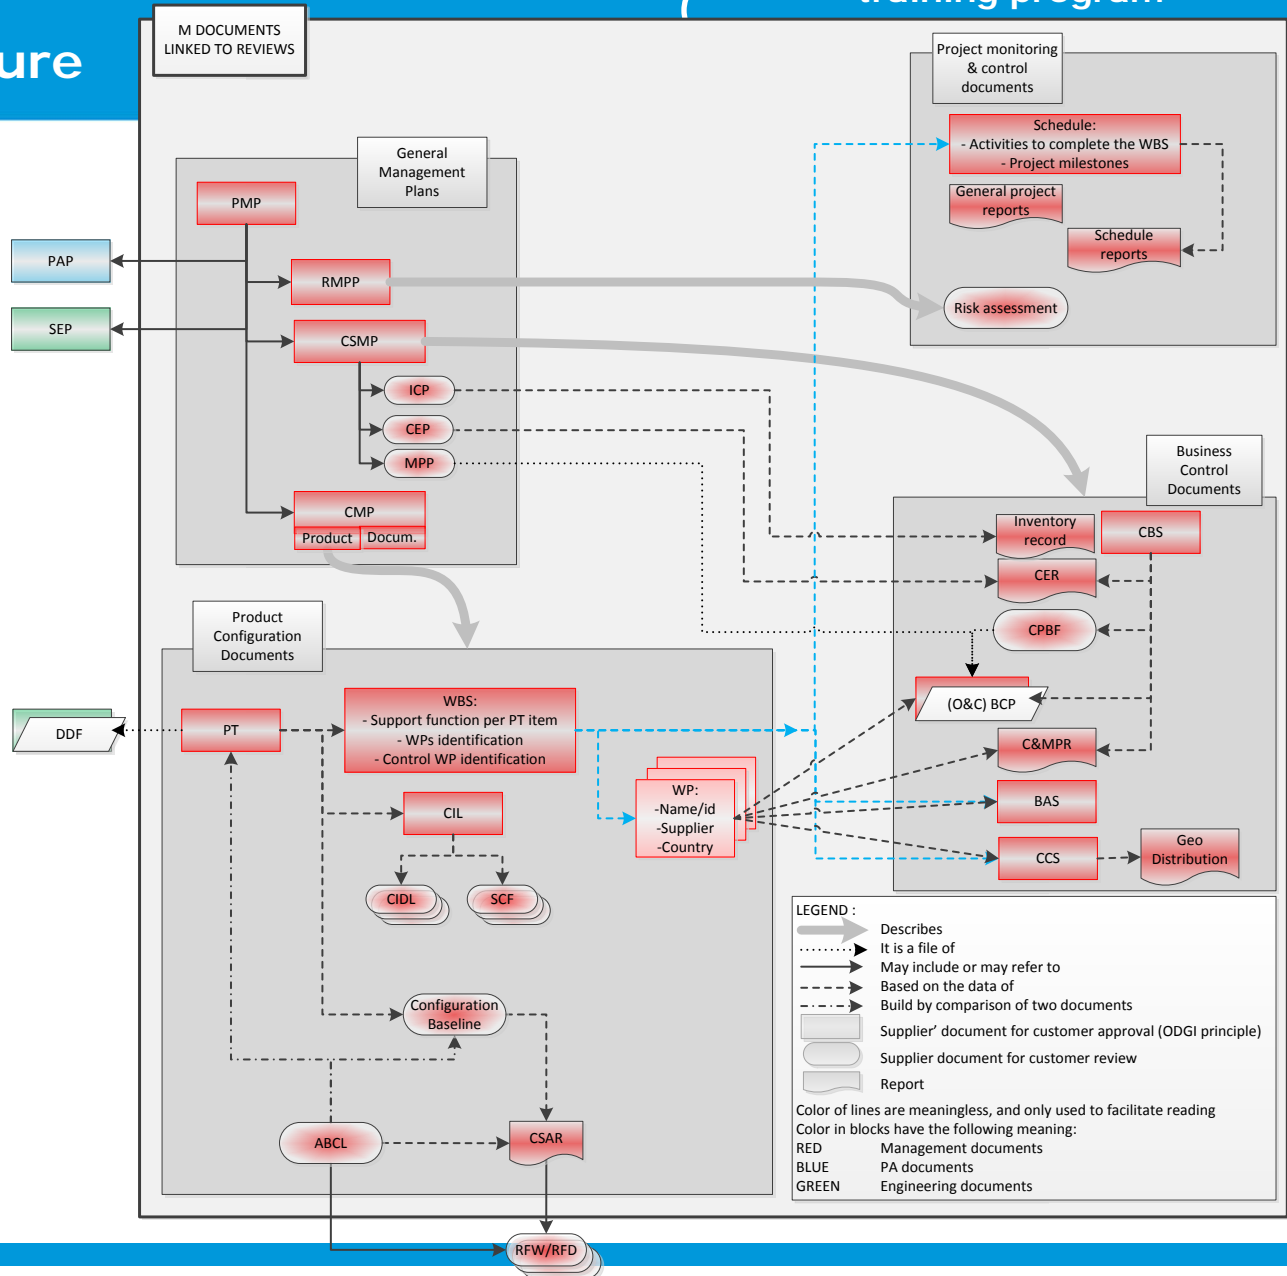

### a. The General management plans, including:

#### 1. The PMP "Project Management Plan", which is the highest M deliverable, and includes:

- a) General management issues:
  - 1) Objectives and constraints of the project
  - 2) Project organization, including project manager, key personnel, specialists, authority and hierarchy, roles and responsibilities, interface with suppliers and other projects.
  - 3) Project breakdown structures, describing the approach to define the project WBS, and pointing the document describing the WBS themselves.
  - 4) A description of the ILS approach
- b) Interfaces with other management areas, including the following documents or pointers them: the Configuration management Plan (CMP, see 2 below), the Cost and schedule management plan (CSMP, see 3 below), ILS approach (see 4 below), the Risk management and plan (RMPP, see 5 below).
- c) Interfaces with other project areas, including the following documents or pointers to them: the Product Assurance Plan (PAP) and the System Engineering Plan (SEP).

#### 2. The CMP, or Configuration management plan, describing how all the configuration management activities, both for the product and for the documentation and information, will be performed.

#### 3. The CSMP, or Cost & Schedule management Plan, describing the approach used to ensure cost and schedule management. It may include or point to the following documents:

- a) The CEP or Cost estimating plan, explaining the organization and processes for cost estimation
- b) The MPP or Milestone payment plan, defining the plan for payment events.

#### 4. The ILS approach, defining the approach use for ILS.

#### 5. The RMPP or Risk management Policy and Plan composed of two documents which can be released together or independently:

- a) The Risk management policy, defining the resources, goals, strategy, margins, ranking/scoring/index schemes, action/acceptance criteria and communication approach.
- b) The Risk management plan, describing the processes and metrics to apply the risk management policy.

### b. The Product Configuration documents, including:

1. **The Product Tree (PT)**, is a description of the hierarchical partitioning of a deliverable product down to an agreed level. Important remarks are:
  - a) Each item in the tree is identified by its name, an identification code, the supplier and the applicable spec.
  - b) Items may include HW or SW.
  - c) All the items of the PT selected to be under configuration control are so identified (see 4 below)
  - d) All items which are recurrent products are so identified.
2. **The WBS**, that:
  - a) For each of the items in the PT, includes a sub-tree with the support functions defined by the customer, and the necessary services and tasks to produce the deliverables. For example, defining for each item in the PT the management, the PA and engineering tasks.
  - b) Identifies the Work packages (WP) by referring the items in the WBS in each WP, ensuring that that the WPs cover the total work scope. Detailed description of each WP is not done here (see 3 below).
3. The description of each **Work Packages** identified in the WBS (see 2.b above), including among others the name of the package, manager in charge, supplier and supplier country, description of the included (and excluded) tasks, deliverables, location and start and end dates.
4. The **Configuration item list (CIL)**, listing the items (HW or SW) of the PT which have been identified to be under configuration control [see b.1.(b) above]., with name, code, quantity, supplier and applicable specification.
5. Each item in the CIL is described in a **Configuration Item Data List (CIDL)**, listing all the relevant data of the item under configuration control.
6. Each item SW in the CIL is described in the **SW configuration file (SCF)**
7. **The configuration baseline (CB)**, is a set of documents, to be agreed between customer and supplier, reflecting the actual configuration of the product. The initial CB refers to the “as-design” product, but it will need to be updated to refer to the “as-built” product when the latter differs from the former.
8. The **As-built configuration list (ABCL)**, reflecting the actual status of the product “as-built”, listing the differences with the “as design”, and justifying these differences by making reference to the corresponding RFW/RFD.
9. The **Configuration status accounting report (CSAR)**, collecting and summarizing the necessary information to support a meaningful configuration management.

c. The **Business control documents**, including:

1. The **Cost breakdown structure (CBS)**, that is the breakdown of all the cost concepts of the project to categories to be used for cost management, with clear differentiation between direct and indirect costs. Figure in Slide 51 shows an example.
2. **The CPBF** (Company price breakdown forms), which shows the manpower and cost data broken down according to the categories defined in the CBS.
3. **The BAS** (Business Agreement Structure) [called Contract Structure in ESA/REG/001 Annex IV], is a breakdown structure of the of suppliers indicating their reporting lines and the WPs assigned to each supplier. An example is in Slide 52 (top). It has to be completely mapped to the WBS as shown in Slide 52 (bottom), and fully consistent with the defined Work packages (since the WP also contain information on suppliers).
4. **The CCS** (Country/Company structure), which shows the relationship between suppliers in the BAS and the country where the work is performed. If this relationship is simple, the CCS is normally combined with the BAS in a single document.
5. The **Cost estimate report**, which reports, for each of the cost items identified in the CBS, the estimation method, quality of the estimate, hypothesis, sensitivity analysis (influence to the total cost), cost risk analysis, and recommendations.
6. The actual **Cost and Manpower report** is only necessary for cost reimbursement contracts. It gives a detailed status on the expenses incurred by the supplier.
7. The **Baseline Cost Plans** (BCP) document the contractually agreed cost and manpower.



d. The **Project Monitoring, schedule and control** documents, including:

1. The **Project Schedule**, which consist on a timed network of activities (showing their interdependencies) against defined milestones, preferably in a Gant-Chart, and identifying the critical path:
  - a) The network of activities are derived from the **WBS**.
  - b) The milestones depend on the project, but typically include the start and end of each phase and the project reviews (see **PMP**), production/test/delivery reviews (see **PMP**), payment milestones (see **payment plan**), and CFE delivery dates.
  
2. The progress reports (not relevant for the contract), including:
  - a) General Project **Progress reports**,
  - b) The **Schedule Progress report**, including the work actually performed against the original Project Schedule, trend analysis for the milestones, justification of deviations, remedy actions and status of deliverable items.
  
3. **Risk assessment report**, explaining how the **risk policy and plan** has been applied and followed for the identification and mitigation of risks, and listing all the registered risks, with their rank, rating and trend.

## General tailoring basic principles

- All disciplines and associated requirements addressed by the management standards are basically applicable to all suppliers within the customer/supplier chain of a project.
- Appropriate tailoring of the standards by the top level customer to match project needs is essential so that a coherent management approach is achieved at all project levels.
- However, for M standard, due to their generality, is very likely that tailoring will be minimum.

## Tailoring practices in ESA

- M requirements are generic enough to justify a “generic pre-tailoring for all ESA projects”, covered in a document called the “ESA MaRD (Management Requirement Document) template”
- The ESA MaRD template needs to be finally tailored for the specificities of a particular project. The result of this exercise will be the “Project MARD”. It is expected that this final tailoring will be minimum.
- Documents to be delivered are specified in a separate Document Requirement List (DRL), including the DRDs and project specific documents. Guidelines for the DRD part in ECSS-M-ST-10 Annex F.

## Feedback

- The major input for maintaining & improving ECSS standards is the feedback from projects that have used tailoring these standards to comply with their project needs
- Feedback from some ESA projects has been provided within ESA, and to the ECSS secretariat as an input for possible updates to the ECSS standards, or for use to build pre-tailored standards for future use by the Agency.
- Feedback received so far from ESA, from the tailoring of ECSS management standards, has been provided by several projects: Sentinel, MTG, SOL, Euclide, Proba and Metop SG (in the form of MARDs and DRDs)
  - Some apply the tailoring process as described before
  - Some documents are self contained (rewrite of most of the requirements)
- This feedback is being used as an input to the preparation of a “pre-tailored” ESA Management Requirements Document (ESA MARD), which will be made available for use by future ESA projects.

## Feedback

2. The feedback generated via the ESA MARDs has included several examples which could possibly be used to improve the coverage of the ECSS management standards. Typical examples are :

- a. Management Requirements/Contract interface
- b. Change Control
- c. Electronic documentation and distribution

Note: Feedback will be provided to ECSS on these points

3. The template approach at organization level is a useful tool, when consolidated, for tailoring ECSS standards.

Thanks for your attention

*Any question?*